

Partial Decode-Forward Binning Schemes for the Causal Cognitive Relay Channels

Zhuohua Wu and Mai Vu

Abstract

The causal cognitive relay channel (CRC) has two sender-receiver pairs, in which the second sender obtains information from the first sender causally and assists the transmission of both senders. In this paper, we study both the full- and half-duplex modes. In each mode, we propose two new coding schemes built successively upon one another to illustrate the impact of different coding techniques. The first scheme called *partial decode-forward binning* (PDF-binning) combines the ideas of partial decode-forward relaying and Gelfand-Pinsker binning. The second scheme called *Han-Kobayashi partial decode-forward binning* (HK-PDF-binning) combines PDF-binning with Han-Kobayashi coding by further splitting rates and applying superposition coding, conditional binning and relaxed joint decoding.

In both schemes, the second sender decodes a part of the message from the first sender, then uses Gelfand-Pinsker binning technique to bin against the decoded codeword, but in such a way that allows both state nullifying and forwarding. For the Gaussian channels, this PDF-binning essentializes to a correlation between the transmit signal and the binning state, which encompasses the traditional dirty-paper-coding binning as a special case when this correlation factor is zero. We also provide the closed-form optimal binning parameter for each scheme.

The 2-phase half-duplex schemes are adapted from the full-duplex ones by removing block Markov encoding, sending different message parts in different phases and applying joint decoding across both phases. Analysis shows that the HK-PDF-binning scheme in both modes encompasses the Han-Kobayashi rate region and achieves both the partial decode-forward relaying rate for the first sender and interference-free rate for the second sender. Furthermore, this scheme outperforms all existing schemes.

I. INTRODUCTION

The causal Cognitive Relay Channel (CRC) is a four-node channel with two senders and two receivers, in which the second sender obtains information from the first sender causally, then uses that to assist the transmissions of the first sender and its own message. Different from the assumption in the traditional cognitive channel that the secondary user knows the primary user's message non-causally, we propose several coding schemes in which the secondary user first decodes the primary user's message causally, then transmits the decoded message and its own message cognitively.

In this paper, we study the cognitive relay channel in both full- and half-duplex modes. Analysis for the full-duplex mode gives us insights into the optimal coding schemes, while application to the half-duplex mode is more practical. In the full-duplex mode, there is no time division into sub-phases; both senders transmit all messages during the whole transmission. In the half-duplex mode, however, the transmission is divided into two phases with different message parts sent during each phase. In the first phase, the second user obtains a message from the first sender causally. In the second phase, these two senders transmit the messages concurrently.

The authors are with the Department of Electrical and Computer Engineering, McGill University, Montreal, Canada (e-mails: zhuo-hua.wu@mail.mcgill.ca, mai.h.vu@mcgill.ca).

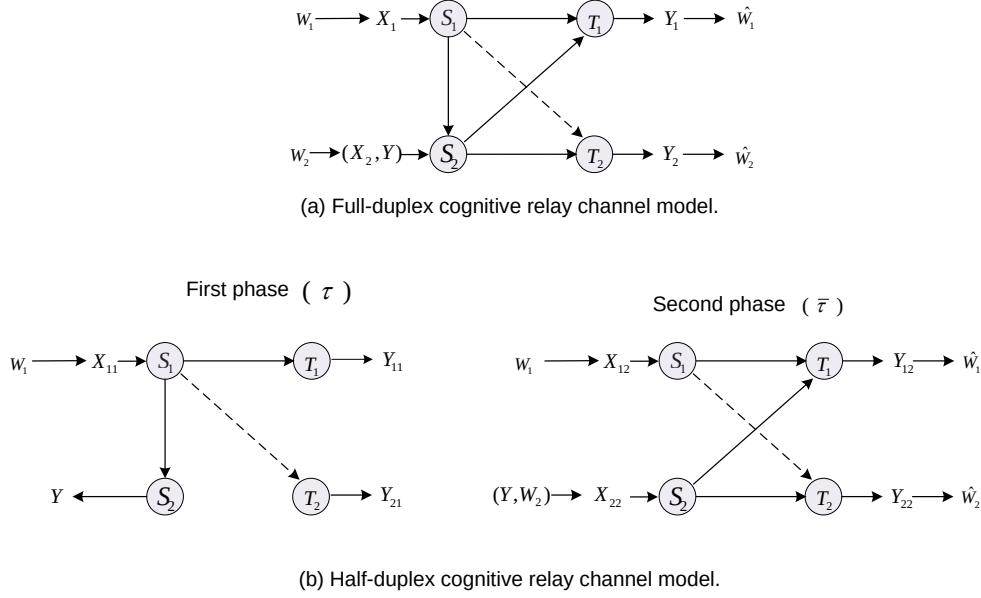


Fig. 1. The full- and half-duplex modes for the cognitive relay channel.

This cognitive relay channel has not been studied much in the literature. But it has tight relationships with the relay channel (RC), the interference channel (IC) and the cognitive interference channel (CIC). On the one hand, the second sender serves as a relay and helps forward the message from the first sender. On the other hand, these two senders interfere with each other during the transmission, and they can also cooperate cognitively. The closest channel to the CRC is the interference channel with source cooperation (IC with SC), in which both senders can exchange messages causally.

Next, we review existing work related to the cognitive relay channel in both full- and half-duplex modes, then briefly summarize our main results.

A. Related work

1) *Full-duplex case:* i) *Relay channel:* Van der Meulen first proposes the concept of relay channel in [1]. Cover and El Gamal further design several important techniques for relay channels, including decode-forward, compress-forward, and mixed decode-forward and compress-forward in [2]. A variation of the decode-forward scheme is partial decode-forward, in which the relay only decodes a part of the message from the source and forwards it to the destination instead of decoding the whole message. Kramer, Gastpar and Gupta [3] extend these schemes to the multiple-node relay networks and propose several rate regions based on decode-forward, compress-forward and mixed strategies. Lim, Kim, El Gamal and Chung [4] propose a new scheme called noisy network coding (NNC) based on compress-forward relaying. These relay coding techniques have been widely applied in other channels. For example, in [5], Liang and Kramer study the relay broadcast channel using the idea of rate splitting, block Markov encoding and partial decode-forward relaying.

ii) *Interference channel:* Carleial first introduces the interference channel and proposes inner and outer bounds as well as capacity results for several special cases in [6]. Sato studies the capacity for the Gaussian interference channel with strong interference in [7]. Han and Kobayashi propose the well-known Han-Kobayashi coding technique in [8] using rate splitting at the transmitters and joint decoding at the receivers, which to date achieves the largest

rate region for the interference channel. Chong, Motani, Garg and El Gamal [9] propose a variant scheme based on superposition coding, which achieves the same rate region as the original Han-Kobayashi scheme but has fewer auxiliary random variables and hence reduces the encoding and decoding complexities.

iii) Cognitive interference channel: The cognitive interference channel is another closely related channel, which plays a significant role in improving spectrum efficiency. Devroye, Mitran and Tarokh first propose the concept in [10] and provide an achievable rate region based on combining Gelfand-Pinsker coding [11] with Han-Kobayashi scheme. They study both the genie-aided (non-causal) and the non genie-aided (causal) cases. Maric, Yates and Kramer determine the capacity region for the channel with very strong interference in [12]. Wu, Vishwanath and Arapostathis determine the capacity region for the weak interference case in [13]. Other coding schemes for the cognitive interference channel can be seen in [14]–[16]. Jovicic and Viswanath [17] analyze the Gaussian cognitive channel and give the largest rate for the cognitive user under the constraint that the primary user experiences no rate degradation and uses single-user decoder. Rini, Tuninetti and Devroye [18] further propose several new inner, outer bounds and capacity results based on rate spitting, superposition coding, a broadcast channel-like binning scheme and Gelfand-Pinsker coding.

An important technique used in all cognitive coding is the binning technique proposed by Gelfand and Pinsker in [11]. In Gelfand-Pinsker binning, the state of the channel is known at the input, but unknown at the output. Marton [19] proposes the double binning scheme and applies it to the broadcast channel. Kim, Sutivong and Cover [20] further analyze Gelfand-Pinsker binning to allow the decoding of a part of state information at the destination at a reduced information rate. Costa [21] applies Gelfand-Pinsker binning to the Gaussian channel and proposes the well-known dirty paper coding (DPC) scheme, which achieves the same rate as if the channel is interference free. A surprising feature of DPC binning is that the transmit signal is independent of the state.

iv) Interference channel with source cooperation: Host-Madsen [22] studies outer and inner bounds for the interference channel with either destination or source cooperation. The achievable rate for source cooperation is based on block Markov encoding and dirty paper coding, which includes the rate for decode-forward relaying but not the Han-Kobayashi region. Prabhakaran and Viswanath [23] investigate the Gaussian interference channel with source cooperation and propose an achievable rate region built on block Markov encoding, superposition coding and Han-Kobayashi scheme, but without binning, as well as several upper bounds on the sum rate. Wang and Tse [24] study the Gaussian interference channel with conferencing transmitters and propose an achievable rate region within 6.5 bits/s/Hz of the capacity for all channel parameters. The channel is based on conferencing model, in which the common message parts are known through noiseless conference links between the two transmitters before each block transmission begins, hence there is no need for block Markovity. The scheme utilizes Marton's double binning for the cooperative private messages and superposition coding but not dirty paper coding for the non-cooperative private message parts. Cao and Chen [25] propose an achievable rate region for the interference channel with transmitter cooperation using block Markov encoding, rate splitting and superposition coding, dirty paper coding and random binning. This scheme includes the Han-Kobayashi region but not the decode-forward relaying rate. Yang and Tuninetti [26] study the interference channel with generalized feedback (also known as source cooperation) and propose two schemes. The first scheme uses rate splitting and block Markov superposition coding only, in which the two users send common messages cooperatively. The second scheme extends the first one by using both block Markov superposition coding and binning, in which parts of both common and private messages are sent cooperatively. This scheme also achieves the Han-Kobayashi region but not the decode-forward relaying rate. We will discuss the schemes in [25], [26] in more details in Section III-C. Tandon and Ulukus [27]

study an outer bound for the MAC with generalized feedback based on dependence balance [28] and extend this idea to the interference channel with user cooperation. We will apply this outer bound in Section IV-F.

2) *Half-duplex case:* For half-duplex communications, results also exist for the above channels, albeit fewer than in the full-duplex case.

Host-Madsen and Zhang study capacity bounds for the half-duplex relay channel based on time-division in [29], [30] and give achievable rates for the Gaussian relay channel using partial decode-forward and compress-forward. Zhang, Jiang, Goldsmith and Cui [31] study the half-duplex Gaussian relay channel with arbitrary correlated noises at the relay and destination. They also evaluate the achievable rates using decode-forward, compress-forward and amplify-forward, showing none of these schemes strictly outperforms the others.

Peng and Rajan [32] study the half-duplex Gaussian interference channel and compute several inner and outer bounds for transmitter or receiver cooperation. Transmitter cooperation uses decode-forward and divides the transmission into 3 phases: 2 broadcast phases and 1 MIMO cooperative phase. Wu, Prabhakaran and Viswanath [33] further study source cooperation for the half-duplex interference channel in the symmetric linear deterministic case and compute its sum rate.

For the half-duplex cognitive interference channel, Devroye, Mitran and Tarokh [10] propose four protocols in which the secondary user obtains the message from the primary user causally. Time-sharing these 4 protocols can achieve the Han-Kobayashi rate region but not the decode-forward relaying rate. Chatterjee, Tong and Oyman [34] further propose a new achievable rate region by a 2-phase scheme based on rate splitting, block Markov encoding, Gelfand-Pinsker binning and backward decoding. This scheme can only achieve the rate of decode-forward relaying, which is less than the partial decode-forward rate in the half-duplex mode. We will discuss these two schemes in more details in Section VI-C.

B. Summary of Main Results

In this paper, we fully define the cognitive relay channel in both the full- and half-duplex modes and propose several coding schemes based on partial decode-forward relaying, Gelfand-Pinsker binning and Han-Kobayashi coding.

1) *Full-duplex case:* The full-duplex cognitive relay channel is a four-node channel with two sender-receiver pairs S_1 - T_1 and S_2 - T_2 , as in Figure 1(a). S_1 and S_2 want to transmit messages to T_1 and T_2 , respectively. S_2 also serves as a relay by forwarding S_1 's message to T_1 while transmitting its own message to T_2 . Since S_2 can both relay and apply cognitive coding at the same time, this gives rise to the name Cognitive Relay Channel (CRC).

We propose two new coding schemes, in which the second scheme is built successively on top of the first one to illustrate the effect of each technique used.

- The first scheme is called *partial decode-forward binning (PDF-binning)*, which utilizes rate splitting, block Markov encoding, partial decode-forward relaying, Gelfand-Pinsker binning and forward joint decoding across two blocks. S_1 divides its message into two parts: one as a private message sent to T_1 directly, the other as a forwarding message, which is sent to T_1 with the help of S_2 . S_2 first causally decodes the forwarding message part from S_1 , then uses the decoded codeword as the binning state. In this case, however, the binning also allows S_2 to forward a part of the state to T_1 , who then uses joint decoding across two blocks to decode its messages from both S_1 and S_2 . Different from state amplification in [20], here we want to decode the state at a different receiver (T_1) from decoding the message (T_2). This scheme achieves the partial decode-forward relaying rate for user 1 and Gelfand-Pinsker rate for user 2.

- The second scheme is called *Han-Kobayashi PDF-binning (HK-PDF-binning)*, which combines PDF-binning with Han-Kobayashi coding by having both users further split their messages. S_1 divides its message into three parts: one as the Han-Kobayashi (HK) private message decoded only at T_1 , another as the HK public message decoded at both T_1 and T_2 , and the final part as the forwarding message. S_2 divides its message into two parts: one as the HK private message and the other as the HK public message. There are three ideas additional to PDF-binning. First, in performing partial decode-forward, S_2 uses conditional binning instead of traditional binning to bin only its private message part. Second, although T_1 uses joint decoding in both schemes, the decoding rule here is relaxed as T_1 also decodes the public message from S_2 without requiring it to be correct. Third, instead of simple Gelfand-Pinsker decoding, T_2 uses joint decoding of the binning auxiliary random variable and the HK public messages from the two senders which are encoded independently of the state. HK-PDF-binning achieves both the Han-Kobayashi and the PDF-binning rate regions.

2) *Half-duplex case*: For the half-duplex CRC, the transmission is divided into two phases as in Figure 1 (b). In the first phase, S_1 transmits to S_2 , T_1 and T_2 . In the second phase, the two senders transmit messages simultaneously, during which S_2 can both relay and apply cognitive encoding.

We adapt the above two coding schemes to the half-duplex case. The main challenges in adapting full-duplex schemes to the half-duplex mode include deciding which message parts should be sent in which phase and changing the destination decoding rule to joint decoding across both phases.

Specifically, we propose two half-duplex (HD) schemes: HD-PDF-binning and HD-HK-PDF-binning. At the end of the first phase in both schemes, S_2 decodes a message part from S_1 then applies PDF-binning, but neither T_1 nor T_2 decode here. Both T_1 and T_2 only decode at the end of the second phase. There are several differences from full-duplex coding. First, not all message parts are sent in each phase. Second, there is no need for block Markovity, instead, we superposition codewords in the two phases of the same block. Third, we use joint decoding at the destinations over two phases of the same block instead of over two consecutive blocks.

3) *Applications to Gaussian channels*: When applied to the Gaussian channel, a major difference between PDF-binning and the traditional binning in dirty paper coding (DPC) [21] is that we introduce a correlation between the transmit signal and the state. This correlation allows both binning and forwarding at the same time, thus helps improve the transmission rate for the first user and still allows the second user to achieve the interference-free rate. We derive the closed-form optimal binning parameter for each coding scheme. This PDF-binning parameter contains the DPC-binning parameter as a special case.

Results show that the HK-PDF-binning scheme outperforms all existing schemes in both the full- and half-duplex modes for the cognitive relay channel. Our analysis also shows clearly the impact on rate region of each of the techniques used. Furthermore, the maximum rate for the primary sender is the rate of partial decode-forward relaying and the maximum rate for the secondary sender is the interference-free rate as in dirty paper coding.

II. CRC CHANNEL MODELS

A. Full-duplex DM-CRC model

The full-duplex cognitive relay channel consists of two input alphabet $\mathcal{X}_1, \mathcal{X}_2$, and three output alphabets $\mathcal{Y}_1, \mathcal{Y}_2, \mathcal{Y}$. The channel is characterized by a channel transition probability $p(y_1, y_2, y | x_1, x_2)$, where x_1 and x_2 are the transmit signals of S_1 and S_2 , y_1 , y_2 and y are the received signals of T_1 , T_2 and S_2 . Figure 1(a) illustrates the channel model, where W_1 and W_2 are the messages of S_1 and S_2 . For notation, we use upper case letters to

indicates random variables and lower case letters to indicate their realizations. We use x^n and x_k^n to represent the vectors $(x_1, \dots, x_n)$ and $(x_k, \dots, x_n)$ respectively.

The cognitive relay channel has tight relationships with the interference and the relay channels. For example, this channel model can be converted to the interference channel [6] if S_2 does not forward any information to T_1 . Similarly, this channel reduces to the relay channel [1], [2] if S_2 does not have any message for T_2 .

A $(2^{nR_1}, 2^{nR_2}, n)$ code, or a communication strategy for n channel uses with rate pair (R_1, R_2) , consists of the following:

- Two message sets $\mathcal{W}_1 \times \mathcal{W}_2 = [1, 2^{nR_1}] \times [1, 2^{nR_2}]$ and independent messages W_1, W_2 uniformly distributed over $\mathcal{W}_1$ and $\mathcal{W}_2$, respectively.
- Two encoders: one maps message w_1 into codeword $x_1^n(w_1) \in \mathcal{X}_1^n$, and one maps w_2 and each received sequence y^{k-1} into a symbol $x_{2k}(w_2, y^{k-1}) \in \mathcal{X}_2$.
- Two decoders: one maps y_1^n into $\hat{w}_1 \in \mathcal{W}_1$; one maps y_2^n into $\hat{w}_2 \in \mathcal{W}_2$.

The probability of error when the message pair (W_1, W_2) is sent is defined as $P_e(W_1, W_2) = P\{(\widehat{W}_1, \widehat{W}_2) \neq (W_1, W_2)\}$. A rate pair (R_1, R_2) is said to be *achievable* if, for any $\epsilon > 0$, there exists a code such that the average error probability $P_e \leq \epsilon$ as $n \rightarrow \infty$. The capacity region is the convex closure of the set of all achievable rate pairs.

B. Half-duplex DM-CRC model

The half-duplex cognitive relay channel also consists of four nodes: two senders S_1, S_2 and two receivers T_1, T_2 . S_1 wants to send a message to T_1 . S_2 serves as a causal relay node and helps forward messages from S_1 to T_1 , while also sending its own message to T_2 . The transmission in the half-duplex mode is divided into two phases. In the first phase, S_1 transmits its message and S_2, T_1 and T_2 listen. In the second phase, both S_1 and S_2 transmit and T_1 and T_2 listen. This 2-phase transmission allows, for example, S_2 to decode a part of the message from S_1 in the first phase and then forwards this part with its own message in the second phase.

Formally, the half-duplex cognitive relay channel consists of three input alphabet $\mathcal{X}_{11}, \mathcal{X}_{12}, \mathcal{X}_{22}$, and five output alphabets $\mathcal{Y}_{11}, \mathcal{Y}_{21}, \mathcal{Y}, \mathcal{Y}_{12}, \mathcal{Y}_{22}$. The channel is characterized by a channel transition probability $p_c(y_{11}, y_{21}, y, y_{12}, y_{22}, |x_{11}, x_{12}, x_{22})$ defined as

$$p_c(y_{11}, y_{21}, y, y_{12}, y_{22}, |x_{11}, x_{12}, x_{22}) = \begin{cases} p(y_{11}, y_{21}, y | x_{11}) & \text{if } 0 \leq t \leq \tau, \\ p(y_{12}, y_{22} | x_{12}, x_{22}) & \text{if } \tau \leq t \leq 1, \end{cases} \quad (1)$$

where t is the normalized transmission time within 1 block, x_{11} and x_{21} refer to the transmit signals of S_1 in the first and second phases, respectively; x_{22} refers to the transmit signal of S_2 in the second phase (S_2 does not send any signal in the first phase); y_{11} and y_{12} are the received signals of T_1 in the first and second phases; y_{21} and y_{22} are the received signals of T_2 in the two phases; and y is the received signal of S_2 in the first phase. We assume the channel is memoryless. Figure 1(b) illustrates the channel model, where W_1 and W_2 are the messages of S_1 and S_2 . We use the notation $x^{\tau n} = (x_1, x_2, \dots, x_{\tau n})$ and $x^{\bar{\tau} n} = (x_{\tau n+1}, \dots, x_n)$, which correspond to the codewords sent during the first and second phases.

A $(2^{nR_1}, 2^{nR_2}, n)$ code, or a communication strategy for n channel uses with rate pair (R_1, R_2) , consists of the following:

- Two message sets $\mathcal{W}_1 \times \mathcal{W}_2 = [1, 2^{nR_1}] \times [1, 2^{nR_2}]$ and independent messages W_1, W_2 that are uniformly distributed over $\mathcal{W}_1$ and $\mathcal{W}_2$.

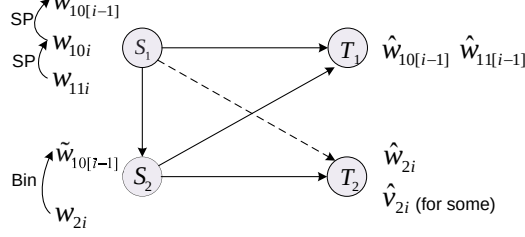


Fig. 2. Coding structure for the full-duplex PDF-binning scheme at block i . (SP stands for superposition)

- Three encoders: two that map message w_1 into codewords $x_{11}^n(w_1) \in \mathcal{X}_{11}^n$ and $x_{12}^n(w_1) \in \mathcal{X}_{12}^n$, and one that maps w_2 and $y^{\tau n}$ into a codeword $x_{22}^n(w_2, y^{\tau n}) \in \mathcal{X}_{22}^n$.
- Two decoders: One maps y_1^n into $\hat{w}_1 \in \mathcal{W}_1$; and one maps y_2^n into $\hat{w}_2 \in \mathcal{W}_2$.

The probability of error, achievable rate and capacity region are defined in a similar way to the full-duplex case.

III. FULL-DUPLEX PARTIAL DECODE-FORWARD BINNING SCHEMES

A. PDF-binning scheme

The first scheme uses block Markov superposition encoding at S_1 and partial decode-forward relaying and Gelfand-Pinsker binning at S_2 . T_1 uses joint decoding across two blocks while T_2 uses normal Gelfand-Pinsker decoding. The first sender S_1 splits its message w_1 into two parts (w_{10}, w_{11}) , which correspond to the common (forwarding) and private parts. We use block Markov encoding at S_1 , such that the current-block common message w_{10} is superimposed on the previous-block common message w'_{10} . Then, message w_{11} is superimposed on both w'_{10} and w_{10} . The second sender S_2 decodes the previous common message w'_{10} from the first sender S_1 then uses binning to bin against the codeword for this message part. Depending on the joint distribution between the binning auxiliary random variable and the state that S_2 can also forward a part of the state (i.e. message w'_{10}) to T_1 . The encoding and decoding structure can be seen in Figure 2, in which w'_{10} corresponds to $w_{10[i-1]}$.

Theorem 1. *The convex hull of the following rate region is achievable for the full-duplex cognitive relay channel using PDF-binning:*

$$\bigcup_{P_1} \left\{ \begin{array}{l} R_1 \leq I(U_{10}; Y|T_{10}) + I(X_1; Y_1|U_{10}, T_{10}) \\ R_1 \leq I(T_{10}, U_{10}, X_1; Y_1) \\ R_2 \leq I(U_2; Y_2) - I(U_2; T_{10}) \end{array} \right. \quad (2)$$

where

$$P_1 = p(t_{10})p(u_{10}|t_{10})p(x_1|t_{10}, u_{10})p(u_2|t_{10})p(x_2|t_{10}, u_2)p(y_1, y_2, y|x_1, x_2).$$

Remark 1. The maximum rate for each user.

- The first user S_1 achieves the maximum rate of partial decode-forward relaying if we set $U_2 = \emptyset$, $X_2 = T_{10}$.

$$R_1^{\max} = \max_{p(u_{10}, x_2)p(x_1|u_{10}, x_2)} \min\{I(U_{10}; Y|X_2) + I(X_1; Y_1|U_{10}, X_2), I(X_1, X_2; Y_1)\} \quad (3)$$

In this case, there is no binning but only forwarding at S_2 .

- The second user S_2 achieves the maximum rate of Gelfand-Pinsker's binning if we set $T_{10} = U_{10} = X_1$.

$$R_2^{\max} = \max_{p(x_1, u_2)p(x_2|x_1, u_2)} \{I(U_2; Y_2) - I(U_2; X_1)\} \quad (4)$$

In this case, there is no forwarding of the state at S_2 .

Proof: The transmission is done in B blocks, each consists of n channel uses. S_1 splits each message w_1 into two independent parts (w_{10}, w_{11}) . During the first $B - 1$ blocks, S_1 encodes and sends a message tuple $(w_{10[i-1]}, w_{10i}, w_{11i}) \in [1, 2^{nR_{10}}] \times [1, 2^{nR_{10}}] \times [1, 2^{nR_{11}}]$; S_2 encodes and sends message $(w_{10[i-1]}, w_{2i}) \in [1, 2^{nR_{10}}] \times [1, 2^{nR_2}]$, where $i = 1, 2, \dots, B - 1$ denotes the block index. When $B \rightarrow \infty$, the average rate triple $(R_{10} \frac{B-1}{B}, R_{11} \frac{B-1}{B}, R_2 \frac{B-1}{B})$ approaches to (R_{10}, R_{11}, R_2) .

We use random codes and fix a joint probability distribution

$$p(t_{10})p(u_{10}|t_{10})p(x_1|t_{10}, u_{10})p(u_2|t_{10})p(x_2|t_{10}, u_2).$$

1) *Codebook generation:* For each block i (We can also just generate two independent codebooks for the odd and even blocks to make the error events of two consecutive blocks independent [5].):

- Independently generate $2^{nR_{10}}$ sequences $t_{10}^n \sim \prod_{k=1}^n p(t_{10k})$. Index these codewords as $t_{10}^n(w'_{10})$, $w'_{10} \in [1, 2^{nR_{10}}]$.
- For each $t_{10}^n(w'_{10})$, independently generate $2^{nR_{10}}$ sequences $u_{10}^n \sim \prod_{k=1}^n p(u_{10k}|t_{10k})$. Index these codewords as $u_{10}^n(w_{10}|w'_{10})$, $w_{10} \in [1, 2^{nR_{10}}]$. w_{10} contains the common message of the current block, while w'_{10} contains the common message of the previous block.
- For each $t_{10}^n(w'_{10})$ and $u_{10}^n(w_{10}|w'_{10})$, independently generate $2^{nR_{11}}$ sequences $x_1^n \sim \prod_{k=1}^n p(x_{1k}|t_{10k}, u_{10k})$. Index these codewords as $x_1^n(w_{11}, w_{10}|w'_{10})$, $w_{11} \in [1, 2^{nR_{11}}]$, $w_{10} \in [1, 2^{nR_{10}}]$.
- Independently generate $2^{n(R_2+R'_2)}$ sequences $u_2^n \sim \prod_{k=1}^n p(u_{2k})$. Index these codewords as $u_2^n(w_2, v_2)$, $w_2 \in [1, 2^{nR_2}]$ and $v_2 \in [1, 2^{nR'_2}]$.
- For each $t_{10}^n(w'_{10})$ and $u_2^n(w_2, v_2)$, generate one $x_2^n \sim \prod_{k=1}^n p(x_{2k}|t_{10k}, u_{2k})$. Denote x_2^n by $x_2^n(w'_{10}, w_2, v_2)$.

2) *Encoding:* At the beginning of block i , let $(w_{10i}, w_{11i}, w_{2i})$ be the new messages to be sent in block i , and $(w_{10[i-1]}, w_{11[i-1]}, w_{2[i-1]})$ be the messages sent in block $i - 1$.

- S_1 knows $w_{10[i-1]}$, in order to send (w_{10i}, w_{11i}) , S_1 transmits $x_1^n(w_{11i}, w_{10i}|w_{10[i-1]})$.
- S_2 searches for a v_{2i} such that

$$(t_{10}^n(w_{10[i-1]}), u_2^n(w_{2i}, v_{2i})) \in A_\epsilon^{(n)}(P_{T_{10}U_2}).$$

Such a v_{2i} exists with high probability if

$$R'_2 \geq I(U_2; T_{10}). \quad (5)$$

S_2 then transmits $x_2^n(w_{10[i-1]}, w_{2i}, v_{2i})$.

3) *Decoding:* At the end of block i :

- S_2 knows $w_{10[i-1]}$ and declares message $\hat{w}_{10i}$ was sent if it is the unique message such that

$$(t_{10}^n(w_{10[i-1]}), u_{10}^n(\hat{w}_{10i}|w_{10[i-1]}), y^n(i)) \in A_\epsilon^{(n)}(P_{T_{10}U_{10}Y}),$$

where $y^n(i)$ indicates the received signal at S_2 in block i . We can show that the decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_{10} \leq I(U_{10}; Y|T_{10}). \quad (6)$$

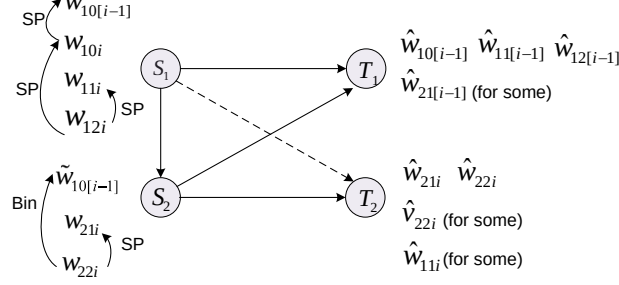


Fig. 3. Coding structure for the full-duplex Han-Kobayashi PDF-binning scheme at block i .

- T_1 knows $w_{10[i-2]}$ and decodes $(w_{10[i-1]}, w_{11[i-1]})$ based on the signals received at block $i-1$ and block i . It declares that message pair $(\hat{w}_{10[i-1]}, \hat{w}_{11[i-1]})$ was sent if it is the unique pair such that

$$(t_{10}^n(w_{10[i-2]}), u_{10}^n(\hat{w}_{10[i-1]}|w_{10[i-2]}), x_1^n(\hat{w}_{11[i-1]}, \hat{w}_{10[i-1]}|w_{10[i-2]}), y_1^n(i-1)) \in A_\epsilon^{(n)}(P_{T_{10}U_{10}X_1Y_1})$$

$$\text{and } (t_{10}^n(\hat{w}_{10[i-1]}), y_1^n(i)) \in A_\epsilon^{(n)}(P_{T_{10}Y_1}).$$

The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_{11} \leq I(X_1; Y_1 | U_{10}, T_{10})$$

$$R_{10} + R_{11} \leq I(T_{10}, U_{10}, X_1; Y_1). \quad (7)$$

- T_2 treats T_{10} , a part of the signal from S_1 , as the state and decodes w_{2i} based on the signal received at block i . Specifically, T_2 decodes w_{2i} directly using joint typicality between u_2 and y_2 . It declares that message $\hat{w}_{2i}$ was sent if it is unique such that

$$(u_2^n(\hat{w}_{2i}, \hat{v}_{2i}), y_2^n(i)) \in A_\epsilon^{(n)}(P_{U_2Y_2})$$

for some $\hat{v}_{2i}$. The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_2 + R'_2 \leq I(U_2; Y_2). \quad (8)$$

Let $R_1 = R_{10} + R_{11}$, apply Fourier-Motzkin Elimination [35] on constraints (5)-(8), we get the rate region in (2). ■

Remark 2. While the idea of the basic PDF-binning scheme is straightforward, this scheme allows the understanding of binning to achieve the maximum rates of partial decode-forward relaying at user 1 as in (3) and Gelfand-Pinsker coding at user 2 as in (4). The importance magnifies in the Gaussian application in Section IV. This scheme helps build the base for more complicated schemes later.

B. Han-Kobayashi PDF-binning scheme

Figure 3 illustrates the idea of the full-duplex Han-Kobayashi PDF-binning scheme. Built upon PDF-binning, each user further splits its message to incorporate Han-Kobayashi coding. Message w_1 is split into three parts: w_{10}, w_{11}, w_{12} , corresponding to the common (forwarding), public and private parts, and message w_2 is split into two parts: w_{21}, w_{22} , corresponding to the public and private parts. Take the transmission in block i as an example. At S_1 , the current common message w_{10i} is superimposed on the previous commons message $w_{10[i-1]}$; message

w_{11i} is encoded independently of both $w_{10[i-1]}$ and w_{10i} ; message w_{12i} is then superimposed on all three messages $w_{10[i-1]}$, w_{10i} and w_{10i} . S_2 decodes $\tilde{w}_{10[i-1]}$ of the previous block and uses conditional binning to bin its private part $w_{22[i]}$ against $\tilde{w}_{10[i-1]}$, conditionally on knowing the public part $w_{21[i]}$. At the end of block i , T_1 uses joint decoding over two blocks to decode a unique tuple $(\hat{w}_{10[i-1]}, \hat{w}_{11[i-1]}, \hat{w}_{12[i-1]})$ for some $\hat{w}_{21[i-1]}$ without requiring this message part to be correct. T_2 treats the codeword for $w_{10[i-1]}$ as the state and searches for a unique pair (w_{21i}, w_{22i}) for some w_{11i} . The detailed coding and decoding procedures are shown in the proof of Theorem 2 below.

Theorem 2. *The convex hull of the following rate region is achievable for the cognitive relay channel using HK-PDF-binning:*

$$\bigcup_{P_2} \left\{ \begin{array}{ll} R_1 & \leq \min\{I_2 + I_5, I_6\} \\ R_2 & \leq I_{12} - I_1 \\ R_1 + R_2 & \leq \min\{I_2 + I_7, I_8\} + I_{13} - I_1 \\ R_1 + R_2 & \leq \min\{I_2 + I_3, I_4\} + I_{14} - I_1 \\ R_1 + R_2 & \leq \min\{I_2 + I_9, I_{10}\} + I_{11} - I_1 \\ 2R_1 + R_2 & \leq \min\{I_2 + I_3, I_4\} + \min\{I_2 + I_9, I_{10}\} + I_{13} - I_1 \\ R_1 + 2R_2 & \leq \min\{I_2 + I_7, I_8\} + I_{11} - I_1 + I_{14} - I_1 \end{array} \right. \quad (9)$$

where

$$P_2 = p(t_{10})p(u_{10}|t_{10})p(u_{11})p(x_1|t_{10}, u_{10}, u_{11})p(u_{21})p(u_{22}|u_{21}, t_{10})p(x_2|t_{10}, u_{21}, u_{22})p(y_1, y_2, y|x_1, x_2), \quad (10)$$

and $I_1 - I_{14}$ are defined as

$$\begin{aligned} I_1 &= I(U_{22}; T_{10}|U_{21}) \\ I_2 &= I(U_{10}; Y|T_{10}) \\ I_3 &= I(X_1; Y_1|T_{10}, U_{10}, U_{11}, U_{21}) \\ I_4 &= I(U_{10}, X_1; Y_1|T_{10}, U_{11}, U_{21}) + I(T_{10}; Y_1) \\ I_5 &= I(U_{11}, X_1; Y_1|T_{10}, U_{10}, U_{21}) \\ I_6 &= I(U_{10}, U_{11}, X_1; Y_1|T_{10}, U_{21}) + I(T_{10}; Y_1) \\ I_7 &= I(X_1, U_{21}; Y_1|T_{10}, U_{10}, U_{11}) \\ I_8 &= I(U_{10}, X_1, U_{21}; Y_1|T_{10}, U_{11}) + I(T_{10}; Y_1) \\ I_9 &= I(U_{11}, X_1, U_{21}; Y_1|T_{10}, U_{10}) \\ I_{10} &= I(T_{10}, U_{10}, U_{11}, X_1, U_{21}; Y_1) \\ I_{11} &= I(U_{22}; Y_2|U_{21}, U_{11}) \\ I_{12} &= I(U_{21}, U_{22}; Y_2|U_{11}) \\ I_{13} &= I(U_{11}, U_{22}; Y_2|U_{21}) \\ I_{14} &= I(U_{11}, U_{21}, U_{22}; Y_2). \end{aligned} \quad (11)$$

Remark 3. Inclusion of PDF-binning and Han-Kobayashi schemes.

- The HK-PDF-binning scheme becomes PDF-binning if $U_{11} = U_{21} = \emptyset$.

- The HK-PDF-binning scheme becomes the Han-Kobayashi scheme if $T_{10} = U_{10} = \emptyset$ and $X_2 = U_{22}$.
- The maximum rates for S_1 and S_2 are the same as in the PDF-binning scheme in (3) and (4).

Proof: We use random codes and fix a joint probability distribution

$$p(t_{10})p(u_{10}|t_{10})p(u_{11})p(x_1|t_{10}, u_{10}, u_{11})p(u_{21})p(u_{22}|u_{21}, t_{10})p(x_2|t_{10}, u_{21}, u_{22}).$$

1) *Codebook generation:* For each block i (or for odd and even blocks):

- Independently generate $2^{nR_{10}}$ sequences $t_{10}^n \sim \prod_{k=1}^n p(t_{10k})$. Index these codewords as $t_{10}^n(w'_{10})$, $w'_{10} \in [1, 2^{nR_{10}}]$.
- For each $t_{10}^n(w'_{10})$, independently generate $2^{nR_{10}}$ sequences $u_{10}^n \sim \prod_{k=1}^n p(u_{10k}|t_{10k})$. Index these codewords as $u_{10}^n(w_{10}|w'_{10})$, $w_{10} \in [1, 2^{nR_{10}}]$. w_{10} is the common message of the current block, while w'_{10} is the common message of the previous block.
- Independently generate $2^{nR_{11}}$ sequences $u_{11}^n \sim \prod_{k=1}^n p(u_{11k})$. Index these codewords as $u_{11}^n(w_{11})$, $w_{11} \in [1, 2^{nR_{11}}]$.
- For each $t_{10}^n(w'_{10})$, $u_{10}^n(w_{10}|w'_{10})$ and $u_{11}^n(w_{11})$, independently generate $2^{nR_{12}}$ sequences $x_1^n \sim \prod_{k=1}^n p(x_{1k}|t_{10k}, u_{10k}, u_{11k})$. Index these codewords as $x_1^n(w_{12}|w_{11}, w_{10}, w'_{10})$, $w_{12} \in [1, 2^{nR_{12}}]$.
- Independently generate $2^{nR_{21}}$ sequences $u_{21}^n \sim \prod_{k=1}^n p(u_{21k})$. Index these codewords as $u_{21}^n(w_{21})$, $w_{21} \in [1, 2^{nR_{21}}]$.
- For each $u_{21}^n(w_{21})$, independently generate $2^{n(R_{22}+R'_{22})}$ sequences $u_{22}^n \sim \prod_{k=1}^n p(u_{22k}|u_{21k})$. Index these codewords as $u_{22}^n(w_{22}, v_{22}|w_{21})$, $w_{22} \in [1, 2^{nR_{22}}]$ and $v_{22} \in [1, 2^{nR'_{22}}]$.
- For each $t_{10}^n(w'_{10})$, $u_{21}^n(w_{21})$ and $u_{22}^n(w_{22}, v_{22}|u_{21})$, generate one $x_2^n \sim \prod_{k=1}^n p(x_{2k}|t_{10k}, u_{21k}, u_{22k})$. Denote x_2^n by $x_2^n(w'_{10}, w_{21}, w_{22}, v_{22})$.

2) *Encoding:* At the beginning of block i , let $(w_{10i}, w_{11i}, w_{12i}, w_{21i}, w_{22i})$ be the new messages to be sent in block i , and $(w_{10[i-1]}, w_{11[i-1]}, w_{12[i-1]}, w_{21[i-1]}, w_{22[i-1]})$ be the messages sent in block $i-1$.

- S_1 knows $w_{10[i-1]}$, in order to send $(w_{10i}, w_{11i}, w_{12i})$, it transmits $x_1^n(w_{12}|w_{11i}, w_{10i}, w_{10[i-1]})$.
- S_2 searches for a v_{22i} such that

$$(t_{10}^n(w_{10[i-1]}), u_{21}^n(w_{21i}), u_{22}^n(w_{22i}, v_{22i}|w_{21i})) \in A_\epsilon^{(n)}(P_{T_{10}U_{22}|U_{21}}). \quad (12)$$

Such a v_{22i} exists with high probability if

$$R'_{22} \geq I(U_{22}; T_{10}|U_{21}). \quad (13)$$

S_2 then transmits $x_2^n(w_{10[i-1]}, w_{21i}, w_{22i}, v_{22i})$.

3) *Decoding:* At the end of block i :

- S_2 knows $w_{10[i-1]}$ and declares message $\hat{w}_{10i}$ was sent if it is the unique message such that

$$(t_{10}^n(w_{10[i-1]}), u_{10}^n(\hat{w}_{10i}|w_{10[i-1]}), y^n(i)) \in A_\epsilon^{(n)}(P_{T_{10}U_{10}Y}),$$

where $y^n(i)$ indicates the received signal at S_2 in block i . We can show that the decoding error probability goes to 0 when $n \rightarrow \infty$ if

$$R_{10} \leq I(U_{10}; Y|T_{10}). \quad (14)$$

- T_1 knows $w_{10[i-2]}$ and searches for a unique tuple $(\hat{w}_{10[i-1]}, \hat{w}_{11[i-1]}, \hat{w}_{12[i-1]})$ for some $\hat{w}_{21[i-1]}$ such that

$$\begin{aligned} & (t_{10}^n(w_{10[i-2]}), u_{10}^n(\hat{w}_{10[i-1]}|w_{10[i-2]}), u_{11}^n(w_{11[i-1]}), x_1^n(\hat{w}_{12[i-1]}|\hat{w}_{11[i-1]}, \hat{w}_{10[i-1]}, w_{10[i-2]}), \\ & u_{21}^n(\hat{w}_{21[i-1]}), y_1^n(i-1)) \in A_\epsilon^{(n)}(P_{T_{10}U_{10}U_{11}X_1U_{21}Y_1}) \\ & \text{and } (t_{10}^n(\hat{w}_{10[i-1]}), y_1^n(i)) \in A_\epsilon^{(n)}(P_{T_{10}Y_1}). \end{aligned} \quad (15)$$

The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$\begin{aligned} R_{12} & \leq I(X_1; Y_1 | T_{10}, U_{10}, U_{11}, U_{21}) \\ R_{10} + R_{12} & \leq I(U_{10}, X_1; Y_1 | T_{10}, U_{11}, U_{21}) + I(T_{10}; Y_1) \\ R_{11} + R_{12} & \leq I(U_{11}, X_1; Y_1 | T_{10}, U_{10}, U_{21}) \\ R_{10} + R_{11} + R_{12} & \leq I(U_{10}, U_{11}, X_1; Y_1 | T_{10}, U_{21}) + I(T_{10}; Y_1) \\ R_{12} + R_{21} & \leq I(X_1, U_{21}; Y_1 | T_{10}, U_{10}, U_{11}) \\ R_{10} + R_{12} + R_{21} & \leq I(U_{10}, X_1, U_{21}; Y_1 | T_{10}, U_{11}) + I(T_{10}; Y_1) \\ R_{11} + R_{12} + R_{21} & \leq I(U_{11}, X_1, U_{21}; Y_1 | T_{10}, U_{10}) \\ R_{10} + R_{11} + R_{12} + R_{21} & \leq I(T_{10}, U_{10}, U_{11}, X_1, U_{21}; Y_1). \end{aligned} \quad (16)$$

- T_2 treats $T_{10}^n(w'_{10[i-1]})$ as the state and decodes $(w_{21i}, w_{22i}, v_{22i})$ based on the signal received in block i . Specifically, T_2 searches for a unique $(\hat{w}_{21i}, \hat{w}_{22i})$ for some $(\hat{w}_{11i}, \hat{v}_{22i})$ such that

$$(u_{11}^n(\hat{w}_{11i}), u_{21}^n(\hat{w}_{21i}), u_{22}^n(\hat{w}_{22i}, \hat{v}_{22i}|\hat{w}_{21i}), y_2^n(i)) \in A_\epsilon^{(n)}(P_{U_{11}U_{21}U_{22}Y_2}). \quad (17)$$

The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$\begin{aligned} R_{22} + R'_{22} & \leq I(U_{22}; Y_2 | U_{21}, U_{11}) \\ R_{21} + R_{22} + R'_{22} & \leq I(U_{21}, U_{22}; Y_2 | U_{11}) \\ R_{11} + R_{22} + R'_{22} & \leq I(U_{11}, U_{22}; Y_2 | U_{21}) \\ R_{11} + R_{21} + R_{22} + R'_{22} & \leq I(U_{11}, U_{21}, U_{22}; Y_2). \end{aligned} \quad (18)$$

Applying Fourier-Motzkin Elimination to (13)-(18), we get rate region (9). ■

Remark 4. Several features of the HK-PDF-binning scheme are worth noting:

- In encoding, w_{10} and w_{11} are encoded independently, then w_{12} is superpositioned on both. This independent coding between the forwarding part (w_{10}) and Han-Kobayashi public part (w_{11}), rather than superposition, is important to ensure the rate region includes both PDF-binning and Han-Kobayashi regions.
- In the binning step (12) at S_2 , we use conditional binning instead of the usual (unconditional) binning. The binning is only between the Han-Kobayashi private message part (w_{22}) and the state (w'_{10}), conditionally on knowing the Han-Kobayashi public message part w_{21} . This conditional binning is possible since w_{21} is decoded at both destinations.
- In the decoding step (17) at T_2 , we use joint decoding of both the Gelfand-Pinsker auxiliary random variable (u_{22}) and the Han-Kobayashi public message parts (w_{11} and w_{21}), instead of decoding Gelfand-Pinsker and Han-Kobayashi codewords separately. This joint decoding is possible since the codewords for w_{11} and w_{21} (i.e. u_{11}^n and u_{21}^n) are independent of the state in Gelfand-Pinsker coding (i.e. t_{10}^n). Joint decoding at both T_1 (15) and T_2 (17) help achieve the largest rate region for this coding structure.

C. Comparison with existing schemes for the interference channel with source cooperation

In this section, we analyze in detail two existing schemes [25], [26] for the interference channel with source cooperation, which are most closely related to the proposed schemes. The interference channel with source cooperation is a 4-node channel in which both S_1 and S_2 can receive signal from each other and use that cooperatively in sending messages to T_1 and T_2 . This channel therefore includes the CRC as a special case (when S_2 sends no information to S_1).

1) *IC with conferencing*: Cao and Chen [25] propose an achievable rate region for the interference channel with source cooperation based on rate splitting, block Markov encoding, superposition encoding, dirty paper coding and random binning. Each user splits its message into three parts: common, private and cooperative messages and divides the cooperative message into cells. The second user generates independent codewords for the current common message (u_2^n), previous cooperative cell index (s_2^n) and current cooperative message (w_2^n). The codewords for the current private message are then superimposed on the current common message and previous cooperative cell index ($v_2^n|u_2^n, s_2^n$). Then, the first user treats the previous cooperative-cell-index codeword (s_2^n) as the state and jointly bins its codewords for the current common message (n_1^n), previous cooperative cell index (h_1^n) and current cooperative message (g_1^n). Finally, the codewords for the first user's private message (m_1^n) is conditionally binned with s_2^n given n_1^n and h_1^n . A two-step decoding with list decoding is then used at each destination.

The common, private and cooperative message parts in [25] correspond roughly to our HK public, HK private and forwarding (common) part, respectively. As such, when applied to the CRC, their scheme differs from the proposed HK-PDF-binning scheme in the following aspects:

- Block Markovity is applied only on the HK private part, whereas in our scheme, block Markovity is applied on all message parts.
- Block Markovity is based on cell division of the previous cooperative message, while in our scheme, block Markovity is on the whole previous common message. This, however, is a minor difference since if each cell contains only one message, then cell index reduces to message index.
- The first user bins both its HK public and private parts (the user labels are switched in [25]), whereas we only bin the HK private part (see Remark 4).
- The scheme in [25] cannot achieve the decode-forward relaying rate because of no block Markovity between the current cooperative-message codeword (w_2^n) and the previous cooperative-cell codeword (s_2^n). In other words, there is no coherent transmission between the source and relay, which can be readily verified from the code distribution. Consider setting $V_1 = V_2 = U_1 = U_2 = 0$, $M_1 = M_2 = N_1 = N_2 = 0$ and $W_2 = S_2 = G_2 = H_2 = 0$ in equation (8) of [25], then the code distribution reduces to

$$p(q)p(g_1|q)p(h_1|q)p(x_1|g_1, q)p(x_2|h_1, q) = p(q, g_1, x_1)p(q, h_1, x_2) \neq p(q, x_1, x_2),$$

where q is the time sharing variable. This distribution implies that the first user splits its message into two parts and independently encodes each of them (by g_1 and h_1). The second user then decodes one part in g_1 and forwards this part to the destination. But because of the independence between g_1 and h_1 , the achievable rate is less than in coherent decode-forward relaying.

Thus, the claim in Remark 2 of [25] that this scheme achieves the capacity region of the degraded relay channel is in fact unfounded.

2) *IC with generalized feedback*: Yang and Tuninetti [26] propose two schemes for the interference channel with generalized feedback based on block Markov superposition coding, binning and backward decoding. Since the

first scheme is a special case of the second, we only analyze their second scheme. Each user splits its message into four parts: cooperative common (w_{10c}), cooperative private (w_{11c}), non-cooperative common (w_{10n}) and non-cooperative private (w_{11n}). Consider the transmission in block b . First, generate independent codewords for the previous cooperative-common messages of both users ($Q^n(w_{10c,b-1}, w_{20c,b-1})$). Then the cooperative-common ($w_{10c,b}$), non-cooperative common ($w_{10n,b}$) and non-cooperative private ($w_{11n,b}$) messages are superimposed on each other successively as V_1, T_1, U_1 , respectively (according to $p(v_1, t_1, u_1|q)$). There are three binning steps after the above codebook generation. First, the codewords S_1, S_2 for the previous cooperative-private messages of both users are binned with each other given Q . Second, V_1, U_1 and T_1 are binned with S_1 and S_2 given Q . Third, the codeword Z_1 for the cooperative-private message ($w_{11c,b}$) is conditionally binned with S_2, U_1 and T_1 given V_1, S_1 and Q . Backward decoding is used, in which each destination applies relaxed joint decoding of all interested messages.

The non-cooperative messages in [26] correspond to our HK public and private parts. Their scheme has two cooperative message parts (the common is decoded at both destinations while the private is not), whereas the proposed HK-PDF-binning has only one common part. To compare these two schemes, we consider the following two special settings to make the message parts equivalent:

i) Set the cooperative-common message (w_{10c}) to $\emptyset$: Their cooperative private message then corresponds to our forwarding (common) message. Their scheme differs markedly from HK-PDF-binning as follows.

- User 1 uses binning among the three message parts instead of superposition coding as in HK-PDF-binning. Block Markov superposition is also replaced by binning with the codeword for the previous cooperative message.
- User 2 applies joint binning of both the non-cooperative common and private parts instead of conditional binning of only the non-cooperative private part, given the non-cooperative common part (see Remark 4).

ii) Set the cooperative-private message (w_{11c}) to $\emptyset$: Their cooperative common message then corresponds to our forwarding (common) message. Their scheme is more similar to HK-PDF-binning, but there are several important differences as follows.

- User 1 now uses superposition coding, but superimposes all three message parts successively, whereas we generate codewords for the forwarding part and the HK public part independently (see Remark 4).
- User 2 also applies joint binning of both non-cooperative message parts instead of conditional binning, similar to case i).
- Destination 2 decodes the cooperative-common part of user 1, thus limits the rate of user 1 to below the decode-forward relaying rate because of the extra rate constraint at destination 2 (this applies even with relaxed decoding). In our proposed scheme, the forwarding part of user 1 is not decoded at destination 2.

As a result, both schemes in [25] and [26], when applied to the CRC, achieve the Han-Kobayashi region but not the decode-forward relaying rate for the first user. Thus, the maximum rates for user 1 in both schemes are smaller than in (3).

Another point is that, in both [25] and [26], joint decoding of both the state and the binning auxiliary random variables is used at the destinations, but this joint decoding is invalid and results in a rate region larger than is possible. In our proposed scheme, all message parts that are jointly decoded with the binning auxiliary variable at the second destination are encoded independently of the state.

Remark 5. Based on our analysis, we conjecture that splitting the common (forwarding) message further into two parts is not necessary for the CRC. In [24], [26], the common message is split into two parts: one for decoding at

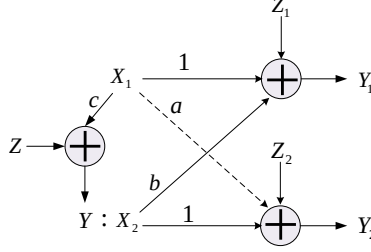


Fig. 4. The standard full-duplex Gaussian cognitive relay channel.

the other destination and the other for binning. Our analysis shows that both these operations can be included in one-step binning by varying the joint distribution between the state and the auxiliary random variable. This joint distribution becomes apparent when applying to the Gaussian channel as in Section IV next.

IV. FULL-DUPLEX GAUSSIAN CRC RATE REGIONS

A. Full-duplex Gaussian CRC model

In this section, we analyze the standard full-duplex Gaussian cognitive relay channel model as follows.

$$\begin{aligned} Y_1 &= X_1 + bX_2 + Z_1 \\ Y_2 &= aX_1 + X_2 + Z_2 \\ Y &= cX_1 + Z, \end{aligned} \tag{19}$$

where $Z_1, Z_2, Z \sim \mathcal{N}(0, 1)$ are independent Gaussian noises. Assume that the transmit signals X_1 and X_2 are subject to power constraints P_1 and P_2 , respectively.

The standard Gaussian CRC is shown in Figure 4. If the original channel is not in this standard form, we can always transform it into the standard form using a procedure similar to the interference channel [6].

B. Signaling and rates for full-duplex PDF-binning

In the Gaussian channel, the signals T_{10}, U_{10}, U_2, X_1 and X_2 of the PDF-binning scheme in Section III-A can be represented as follows.

$$\begin{aligned} T_{10} &= \alpha S'_{10}(w'_{10}), \\ U_{10} &= \alpha S'_{10}(w'_{10}) + \beta S_{10}(w_{10}), \\ X_1 &= \alpha S'_{10}(w'_{10}) + \beta S_{10}(w_{10}) + \gamma S_{11}(w_{11}), \\ X_2 &= \mu \left(\rho S'_{10}(w'_{10}) + \sqrt{1 - \rho^2} S_{22} \right), \\ U_2 &= X_2 + \lambda S'_{10} = (\mu\rho + \lambda) S'_{10} + \mu\sqrt{1 - \rho^2} S_{22}. \end{aligned} \tag{20}$$

where S'_{10}, S_{10}, S_{11} and S_{22} are independent $\mathcal{N}(0, 1)$ random variables to encode w'_{10}, w_{10}, w_{11} and w_2 respectively. U_2 is the auxiliary random variable for binning that encodes w_2 . X_1 and X_2 are the transmit signals of S_1 and S_2 . The parameters $\alpha, \beta, \gamma, \mu$ are power allocation factors satisfying the power constraints

$$\begin{aligned} \alpha^2 + \beta^2 + \gamma^2 &\leq P_1, \\ \mu^2 &\leq P_2, \end{aligned} \tag{21}$$

where P_1 and P_2 are transmit power constraints of S_1 and S_2 .

An important feature of the signaling design in (20) is ρ ($-1 \leq \rho \leq 1$), the correlation factor between the transmit signal (X_2) and the state (S'_{10}) at S_2 . In traditional dirty paper coding, the transmit signal and the state are independent. Here we introduce correlation between them, which includes dirty paper coding as a special case when $\rho = 0$. This correlation allows both signal forwarding and traditional binning at the same time. λ is the partial decode-forward binning parameter which will be optimized later.

Substitute X_1, X_2 into Y_1, Y_2 and Y in (19), we get

$$\begin{aligned} Y_1 &= (\alpha + b\mu\rho)S'_{10} + \beta S_{10} + \gamma S_{11} + b\mu\sqrt{1 - \rho^2}S_{22} + Z_1, \\ Y_2 &= (a\alpha + \mu\rho)S'_{10} + a\beta S_{10} + a\gamma S_{11} + \mu\sqrt{1 - \rho^2}S_{22} + Z_2, \\ Y &= c\alpha S'_{10} + c\beta S_{10} + c\gamma S_{11} + Z. \end{aligned} \quad (22)$$

Corollary 1. *The achievable rate region for the full-duplex Gaussian-CRC using the PDF-binning scheme is the convex hull of all rate pairs (R_1, R_2) satisfying*

$$\begin{aligned} R_1 &\leq C\left(\frac{c^2\beta^2}{c^2\gamma^2 + 1}\right) + C\left(\frac{\gamma^2}{b^2\mu^2(1 - \rho^2) + 1}\right) \\ R_1 &\leq C\left(\frac{(\alpha + b\mu\rho)^2 + \beta^2 + \gamma^2}{b^2\mu^2(1 - \rho^2) + 1}\right) \\ R_2 &\leq C\left(\frac{\mu^2(1 - \rho^2)}{a^2\beta^2 + a^2\gamma^2 + 1}\right) \end{aligned} \quad (23)$$

where $-1 \leq \rho \leq 1$, $C(x) = \frac{1}{2} \log(1 + x)$, and the power allocation factors α, β, γ and μ satisfy the power constraints (21).

Proof: Applying Theorem 1 with the signaling in (20), we get the rate region in Corollary 1. ■

Remark 6. Maximum rates for each sender

- Setting $\rho = \pm 1$, $\mu = \rho\sqrt{P_2}$, we obtain the maximum rate for R_1 as in partial decode-forward relaying:

$$R_1^{\max} = \max_{\alpha^2 + \beta^2 + \gamma^2 \leq P_1} \min \left\{ C\left(\frac{c^2\beta^2}{c^2\gamma^2 + 1}\right) + C(\gamma^2), C\left(\left(\alpha + b\sqrt{P_2}\right)^2 + \beta^2 + \gamma^2\right) \right\}. \quad (24)$$

- Setting $\rho = 0$, $\beta = \gamma = 0$ and $\mu = \sqrt{P_2}$, we obtain the maximum rate for R_2 as in dirty paper coding:

$$R_2^{\max} = C(P_2). \quad (25)$$

C. Optimal binning parameter for full-duplex PDF-binning

In this section, we derive in closed form the optimal binning parameter λ for (20) to achieve rate region (23). This optimal binning parameter is different from the optimal binning parameter in dirty paper coding, as we introduce the correlation factor ρ between the transmit signal and the state. This correlation contains the function of message forwarding. For example, if we set $\rho = \pm 1$, X_2 will only encode w'_{10} without any actual binning, hence realize the function of message forwarding. If we set $\rho = 0$, PDF-binning becomes dirty paper coding without any message forwarding. For $0 < |\rho| < 1$, PDF-binning has both the functions of binning and message forwarding. Thus, PDF-binning generalizes dirty paper coding.

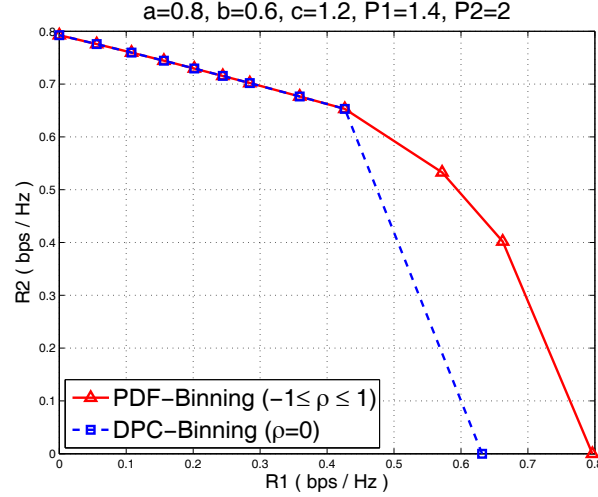


Fig. 5. Effect of the binning correlation factor ρ .

Theorem 3. The optimal λ for the full-duplex PDF-binning scheme is

$$\lambda^* = \frac{a\alpha\mu^2(1-\rho^2) - \mu\rho(a^2\beta^2 + a^2\gamma^2 + 1)}{a^2\beta^2 + a^2\gamma^2 + \mu^2(1-\rho^2) + 1}. \quad (26)$$

Proof: The optimal λ^* is obtained by maximizing both rates R_1 and R_2 . In rate region (2), through the Fourier Motzkin Elimination process, we can see that if we maximize the term $I(U_2; Y_2) - I(U_2; T_{10})$, both R_1 and R_2 are maximized simultaneously. We have

$$\begin{aligned} & I(U_2; Y_2) - I(U_2; T_{10}) \\ &= H(Y_2) - H(Y_2|U_2) - H(U_2) + H(U_2|T_{10}) \\ &= H(Y_2) + H(U_2|T_{10}) - H(U_2, Y_2). \end{aligned}$$

Here λ only affects the last term $H(U_2, Y_2)$. The covariance matrix between U_2 and Y_2 is

$$\text{cov}(U_2, Y_2) = \begin{bmatrix} \text{var}(U_2) & \text{E}(U_2, Y_2) \\ \text{E}(U_2, Y_2) & \text{var}(Y_2) \end{bmatrix}, \quad (27)$$

where

$$\begin{aligned} \text{var}(U_2) &= \mu^2 + \lambda^2 + 2\mu\rho\lambda, \\ \text{E}(U_2, Y_2) &= (\mu\rho + \lambda)(a\alpha + \mu\rho) + \mu^2(1 - \rho^2), \\ \text{var}(Y_2) &= (a\alpha + \mu\rho)^2 + a^2\beta^2 + a^2\gamma^2 + \mu^2(1 - \rho^2) + 1. \end{aligned}$$

Minimizing the determinant of the covariance matrix in (27), we obtain the optimal λ^* in (26). ■

Remark 7. Effect of ρ :

- If $\rho = 0$, λ^* becomes the optimal λ for traditional dirty paper coding [21], which achieves the maximum rate for R_2 as in (25).
- If $\rho = \pm 1$, λ^* differs from the λ in traditional dirty paper coding and achieves the maximum rate for R_1 as in (24).

- The effect of ρ can be seen in Figure 5. The dashed line represents the resulting rate region using only DPC-binning ($\rho = 0$), while the solid line represents the region for PDF-binning when we adapt $\rho \in [-1, 1]$. Figure 5 illustrates that the correlation factor ρ can enlarge the rate region.

D. Signaling and rates for full-duplex Han-Kobayashi PDF-binning

In the Gaussian channel, input signals for the HK-PDF-binning scheme in Section III-B can be represented as

$$\begin{aligned}
T_{10} &= \alpha S'_{10}(w'_{10}), \\
U_{10} &= \alpha S'_{10}(w'_{10}) + \beta S_{10}(w_{10}), \\
U_{11} &= \gamma S_{11}(w_{11}), \\
X_1 &= \alpha S'_{10}(w'_{10}) + \beta S_{10}(w_{10}) + \gamma S_{11}(w_{11}) + \delta S_{12}(w_{12}), \\
U_{21} &= \theta S_{21}(w_{21}), \\
X_2 &= \theta S_{21}(w_{21}) + \mu \left(\rho S'_{10}(w'_{10}) + \sqrt{1 - \rho^2} S_{22} \right), \\
U_{22} &= X_2 + \lambda S'_{10} = (\mu\rho + \lambda) S'_{10} + \theta S_{21}(w_{21}) + \mu \sqrt{1 - \rho^2} S_{22},
\end{aligned} \tag{28}$$

where S'_{10} , S_{10} , S_{11} , S_{12} , S_{21} , S_{22} are independent $\mathcal{N}(0, 1)$ random variables to encode w'_{10} , w_{10} , w_{11} , w_{12} , w_{21} , w_{22} , respectively. U_{22} is the auxiliary random variable for binning that encodes w_{22} . X_1 and X_2 are the transmit signals of S_1 and S_2 . ρ is the correlation coefficient between the transmit signal and the binning state at S_2 ($-1 \leq \rho \leq 1$). λ is the PDF-binning parameter. The parameters α , β , γ , δ , θ and μ are power allocation factors satisfying the power constraints

$$\begin{aligned}
\alpha^2 + \beta^2 + \gamma^2 + \delta^2 &\leq P_1, \\
\theta^2 + \mu^2 &\leq P_2,
\end{aligned} \tag{29}$$

where P_1 and P_2 are transmit power constraints of S_1 and S_2 .

Substitute these variables into the Gaussian channel in (19), we get

$$\begin{aligned}
Y &= c\alpha S'_{10} + c\beta S_{10} + c\gamma S_{11} + c\delta S_{12} + Z, \\
Y_1 &= (\alpha + b\mu\rho) S'_{10} + \beta S_{10} + \gamma S_{11} + \delta S_{12} + b\theta S_{21} + b\mu \sqrt{1 - \rho^2} S_{22} + Z_1, \\
Y_2 &= (a\alpha + \mu\rho) S'_{10} + a\beta S_{10} + a\gamma S_{11} + a\delta S_{12} + \theta S_{21} + \mu \sqrt{1 - \rho^2} S_{22} + Z_2.
\end{aligned} \tag{30}$$

Corollary 2. *The achievable rate region for the full-duplex Gaussian-CRC using the Han-Kobayashi PDF-binning scheme is the convex hull of all rate pairs (R_1, R_2) satisfying*

$$\begin{aligned}
R_1 &\leq \min\{I_2 + I_5, I_6\} \\
R_2 &\leq I_{12} - I_1 \\
R_1 + R_2 &\leq \min\{I_2 + I_7, I_8\} + I_{13} - I_1 \\
R_1 + R_2 &\leq \min\{I_2 + I_3, I_4\} + I_{14} - I_1 \\
R_1 + R_2 &\leq \min\{I_2 + I_9, I_{10}\} + I_{11} - I_1 \\
2R_1 + R_2 &\leq \min\{I_2 + I_3, I_4\} + \min\{I_2 + I_9, I_{10}\} + I_{13} - I_1 \\
R_1 + 2R_2 &\leq \min\{I_2 + I_7, I_8\} + I_{11} - I_1 + I_{14} - I_1
\end{aligned} \tag{31}$$

where

$$\begin{aligned}
I_2 &= C \left(\frac{c^2 \beta^2}{c^2 \gamma^2 + c^2 \delta^2 + 1} \right) \\
I_3 &= C \left(\frac{\delta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_4 &= C \left(\frac{\beta^2 + \delta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) + C \left(\frac{(\alpha + b\mu\rho)^2}{\beta^2 + \gamma^2 + \delta^2 + b^2 \theta^2 + b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_5 &= C \left(\frac{\gamma^2 + \delta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_6 &= C \left(\frac{\beta^2 + \gamma^2 + \delta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) + C \left(\frac{(\alpha + b\mu\rho)^2}{\beta^2 + \gamma^2 + \delta^2 + b^2 \theta^2 + b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_7 &= C \left(\frac{\delta^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_8 &= C \left(\frac{\beta^2 + \delta^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) + C \left(\frac{(\alpha + b\mu\rho)^2}{\beta^2 + \gamma^2 + \delta^2 + b^2 \theta^2 + b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_9 &= C \left(\frac{\gamma^2 + \delta^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_{10} &= C \left(\frac{(\alpha + b\mu\rho)^2 + \beta^2 + \gamma^2 + \delta^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1} \right) \\
I_{11} - I_1 &= C \left(\frac{\mu^2 (1 - \rho^2)}{a^2 \beta^2 + a^2 \delta^2 + 1} \right) \\
I_{12} - I_1 &= C \left(\frac{\mu^2 (1 - \rho^2)}{a^2 \beta^2 + a^2 \delta^2 + 1} \right) + C \left(\frac{\theta^2}{(a\alpha + \mu\rho)^2 + a^2 \beta^2 + a^2 \delta^2 + \mu^2 (1 - \rho^2) + 1} \right) \\
I_{13} - I_1 &= C \left(\frac{\mu^2 (1 - \rho^2)}{a^2 \beta^2 + a^2 \delta^2 + 1} \right) + C \left(\frac{a^2 \gamma^2}{(a\alpha + \mu\rho)^2 + a^2 \beta^2 + a^2 \delta^2 + \mu^2 (1 - \rho^2) + 1} \right) \\
I_{14} - I_1 &= C \left(\frac{\mu^2 (1 - \rho^2)}{a^2 \beta^2 + a^2 \delta^2 + 1} \right) + C \left(\frac{a^2 \gamma^2 + \theta^2}{(a\alpha + \mu\rho)^2 + a^2 \beta^2 + a^2 \delta^2 + \mu^2 (1 - \rho^2) + 1} \right)
\end{aligned}$$

and $\alpha, \beta, \gamma, \delta, \theta$ and μ are power allocation factors satisfying the power constraints (29) and $-1 \leq \rho \leq 1$.

Proof: Applying Theorem 2 with the signaling in (28), we obtain the rate region in Corollary 2. $\blacksquare$

Note that rate region (31) includes both the Han-Kobayashi rate region and the PDF-binning region in (23). Furthermore, the maximum rates for user 1 and user 2 are the same as in (24) and (25).

E. Optimal binning parameter for full-duplex Han-Kobayashi PDF-binning

Corollary 3. The optimal λ^* for the full-duplex HK-PDF-binning scheme is

$$\lambda^* = \frac{a\alpha\mu^2(1 - \rho^2) - \mu\rho(a^2\beta^2 + a^2\delta^2 + 1)}{a^2\beta^2 + a^2\delta^2 + \mu^2(1 - \rho^2) + 1} \quad (32)$$

Proof: λ^* is obtained by maximizing the term $I_{11} - I_1$ in (9). See Appendix A for details. $\blacksquare$

Note that the optimal λ^* in (32) contains both the optimal λ^* for PDF-binning in (26) and the optimal λ for DPC binning [21] as special cases.

F. Numerical examples

In this section, we provide numerical comparison among the proposed PDF-binning and HK-PDF-binning schemes, the original Han-Kobayashi scheme, and an outer bound as discussed below.

1) *Outer bounds for the CRC capacity:* We obtain a simple outer bound for the CRC capacity by combining the capacity for the (non-causal) CIC and the outer bound for interference channel with user cooperation (IC-UC) [27]. Where the CIC capacity result is not available, we use the MISO broadcast capacity.

$$\begin{aligned} \text{CRC capacity} &\subset \text{CIC capacity} \bigcap \text{IC-UC outer bound} \\ &\subset \text{MISO BC capacity} \bigcap \text{IC-UC outer bound}. \end{aligned}$$

a) Capacity of the CIC as an outer bound: The capacity of the ideal CIC (with non-causal knowledge of S_1 's message at S_2) is an outer bound to the CRC rate region. The CIC capacity is known in the cases of (i) weak interference [13], [17] (ii) very strong interference [12] (iii) the primary-decode-cognitive region [36]. For strong interference, we can also use the outer bound to the CIC capacity in [16] as an outer bound to the CRC.

b) IC-UC outer bound: Tandon and Ulukus [27] obtain an outer bound for the MAC with generalized feedback based on dependence balance, which is first proposed by Hekstra and Willems [28] to study outer bounds for the single-output two-way channels. The basic idea of dependence balance is that no more information can be consumed than produced. Tandon and Ulukus apply this idea to obtain a new outer bound for IC-UC. It is shown that this dependence-balance-based outer bound is strictly tighter than the cutset bound (see Section V of [27]). Thus, this bound can be used instead of the relay channel (RC) cutset bound for R_1 .

c) Gaussian Vector Broadcast Outer Bound: Consider a 2×1 MISO broadcast system as

$$\begin{aligned} Y_1 &= [1 \quad b]X + Z_1, \\ Y_2 &= [a \quad 1]X + Z_2, \end{aligned} \quad (33)$$

where a, b are the channel gains, Z_1 and Z_2 are white Gaussian noises with identity covariance. The vector codeword X consists of two independent parts:

$$X = U + V,$$

where $X = \begin{pmatrix} X_1 \\ X_2 \end{pmatrix}$, $U = \begin{pmatrix} U_1 \\ V_1 \end{pmatrix}$, $V = \begin{pmatrix} U_2 \\ V_2 \end{pmatrix}$, and U_1, V_1, U_2, V_2 are zero-mean Gaussian codewords with covariances:

$$K_U = \begin{bmatrix} \alpha^2 & \rho_1 \alpha \beta \\ \rho_1 \alpha \beta & \beta^2 \end{bmatrix}; \quad K_V = \begin{bmatrix} \gamma^2 & \rho_2 \gamma \delta \\ \rho_2 \gamma \delta & \delta^2 \end{bmatrix},$$

in which the power allocation factors satisfy

$$\alpha^2 + \beta^2 \leq P_1, \quad \gamma^2 + \delta^2 \leq P_2, \quad (34)$$

and the input correlation factors $\rho_1, \rho_2 \in [-1, 1]$.

The Gaussian vector broadcast capacity region is the convex closure of $R_{o1} \cup R_{o2}$ [37], where R_{o1} is the region

$$\begin{aligned} R_1 &\leq C \left(\frac{\alpha^2 + 2b\rho_1\alpha\beta + b^2\beta^2}{\gamma^2 + 2b\rho_2\gamma\delta + b^2\delta^2 + 1} \right) \\ R_2 &\leq C (a^2\gamma^2 + 2a\rho_2\gamma\delta + \delta^2) \end{aligned} \quad (35)$$

and R_{o2} is the region

$$\begin{aligned} R_1 &\leq C (\alpha^2 + 2b\rho_1\alpha\beta + b^2\beta^2) \\ R_2 &\leq C \left(\frac{a^2\gamma^2 + 2a\rho_2\gamma\delta + \delta^2}{a^2\alpha^2 + 2a\rho_1\alpha\beta + \beta^2 + 1} \right). \end{aligned} \quad (36)$$

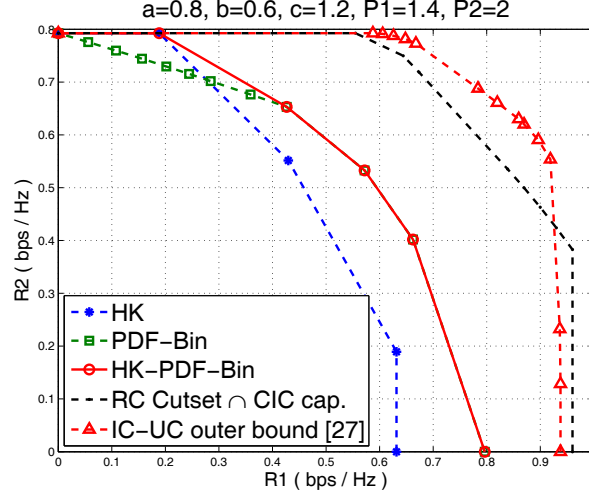


Fig. 6. Rate regions for full-duplex schemes in the Gaussian cognitive relay channel.

2) *Numerical comparison:* Figure 6 shows the comparison in the full-duplex mode among the Han-Kobayashi scheme, PDF-binning, HK-PDF-binning, and the outer bound. We can see that the proposed HD-PDF-binning scheme contains both the Han-Kobayashi and the PDF-binning rate regions, as analyzed in Remark 3. Note that the outer bound is the intersection of the two bounds drawn and is loose as this bound is not achievable. However, we observe that as b decreases, the HK-PDF-binning rate region becomes closer to the outer bound.

V. HALF-DUPLEX CODING SCHEMES

In this section, we adapt the two full-duplex schemes to the half-duplex mode. The half-duplex schemes are also based on rate splitting, superposition encoding, partial decode-forward binning and Han-Kobayashi coding. There are several differences between the half- and full-duplex cases. First, under the half-duplex constraint, no node can both transmit and receive at the same time, thus leading us to divide each transmission block into two phases. In the first phase, S_1 sends a message to S_2 , T_1 and T_2 , while S_2 only receives but sends no messages. In the second phase, both S_1 and S_2 send messages concurrently. Second, S_1 sends different message parts in different phases. Specifically, S_1 only sends one part of its message to other nodes in the first phase, but will send all message parts in the second phase. Third, there is no block Markovity in the encoding since the superposition coding can be done between 2 phases of the same block instead of between 2 consecutive blocks. Finally, both T_1 and T_2 apply joint decoding only at the end of the second phase to make use of the received signals in both phases.

A. Half-duplex partial decode-forward binning scheme

The coding structure for the half-duplex PDF-binning scheme is shown in Figure 7. This scheme uses superposition encoding at the first sender, and partial decode-forward relaying and binning at the second sender. The first sender S_1 splits its message into two parts (w_{10}, w_{11}) , corresponding to the forwarding and private parts. In the first phase, S_1 sends a codeword X_{11}^n containing the message part w_{10} ; S_2 sends no information but only listens. At the end of the first phase, S_2 decodes w_{10} from S_1 . Note that neither T_1 nor T_2 decodes during this phase. In the second phase, S_1 sends a codeword X_{12}^n containing both parts (w_{10}, w_{11}) , in which w_{11} is superimposed on w_{10} . S_2 now sends both w_2 and w_{10} and uses Gelfand-Pinsker binning technique to bin against the codeword $X_{11}^n(w_{10})$ decoded

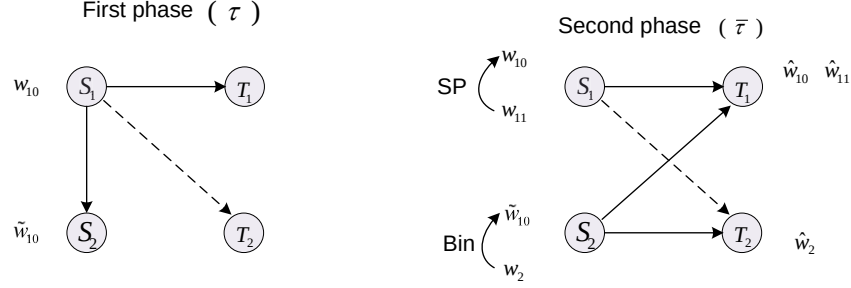


Fig. 7. Coding structure for the half-duplex CRC based on partial decode-forward binning.

from S_1 in the first phase. At the destinations, T_1 uses joint decoding to decode (w_{10}, w_{11}) from the signals received in both phases; T_2 decodes w_2 using the received signal in the second phase.

Specifically, at the end of the first phase, S_2 searches for a unique $\hat{w}_{10}$ such that

$$(x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y}),$$

where $\mathbf{y}$ is the received signal vector at S_2 in the first phase. It then performs binning by looking for a v_2 such that

$$(x_{11}^{\bar{\tau} n}(\hat{w}_{10}), u_2^{\bar{\tau} n}(w_2, v_2)) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{X_1 U_2}),$$

and sends $x_{22}^{\bar{\tau} n}(\mathbf{x}_{11}, \mathbf{u}_2)$ as a function of $x_{11}^{\bar{\tau} n}$ and $u_2^{\bar{\tau} n}$ in the second phase.

At the end of the second phase, T_1 searches for a unique $(\hat{w}_{10}, \hat{w}_{11})$ such that

$$(x_{11}^{\tau n}(\hat{w}_{10}), x_{12}^{\tau n}(\hat{w}_{11}|\hat{w}_{10}), \mathbf{y}_{12}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}X_{12}Y_{12}})$$

$$\text{and } (x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}_{11}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y_{11}}),$$

where $\mathbf{y}_{11}$ and $\mathbf{y}_{12}$ indicate the received vectors at T_1 during the first and second phases, respectively. T_2 treats the codeword X_{11}^n as the state and decodes w_2 . It searches for a unique $\hat{w}_2$ for some $\hat{v}_2$ such that

$$(u_2^{\bar{\tau} n}(\hat{w}_2, \hat{v}_2), \mathbf{y}_{22}) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{U_2 Y_{22}}),$$

where $\mathbf{y}_{22}$ is the received vector at T_2 in the second phase.

Theorem 4. *The convex hull of the following rate region is achievable for the half-duplex cognitive relay channel using PDF-binning:*

$$\bigcup_{P_3} \left\{ \begin{array}{l} R_1 \leq \tau I(X_{11}; Y) + \bar{\tau} I(X_{12}; Y_{12} | X_{11}) \\ R_1 \leq \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, X_{12}; Y_{12}) \\ R_2 \leq \bar{\tau} I(U_2; Y_{22}) - \bar{\tau} I(U_2; X_{11}) \end{array} \right. \quad (37)$$

where

$$P_3 = p(x_{11})p(x_{12}|x_{11})p(u_2|x_{11})p(x_{22}|x_{11}, u_2)p_c(y_{11}, y_{21}, y, y_{12}, y_{22}|x_{11}, x_{12}, x_{22}),$$

and p_c is given in (1), $\bar{\tau} = 1 - \tau$, $0 \leq \tau \leq 1$.

Proof: See Appendix B for the detailed proof. ■

Remark 8. The maximum rate for each user.

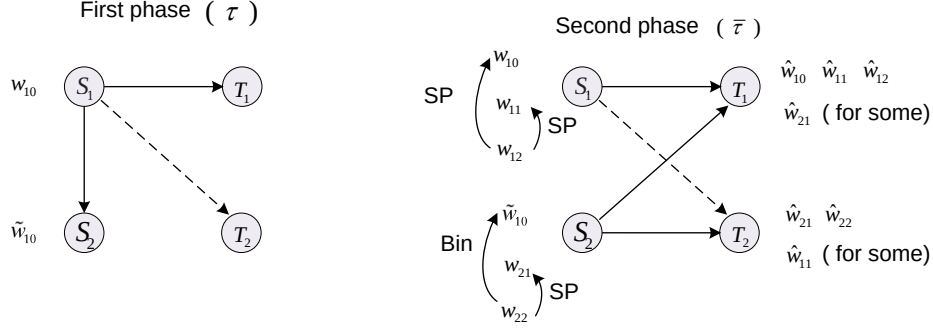


Fig. 8. Coding structure for the half-duplex CRC based on Han-Kobayashi partial decode-forward binning.

- The first user S_1 achieves the maximum rate of half-duplex partial decode-forward relaying if we set $U_2 = \emptyset$.

$$R_1^{\max} = \max_{\substack{0 \leq \tau \leq 1 \\ p(x_{11}, x_{12})}} \min \{ \tau I(X_{11}; Y) + \bar{\tau} I(X_{12}; Y_{12} | X_{11}), \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, X_{12}; Y_{12}) \}. \quad (38)$$

This half-duplex $R_1^{\max}$ is slightly smaller than in the full-duplex case of (3).

- The second user S_2 achieves the maximum rate of Gelfand-Pinsker's binning if we set $\tau = 0$, $X_{12} = X_{11}$.

$$R_2^{\max} = \max_{p(x_{11}, u_2) p(x_{22} | x_{11}, u_2)} \{ I(U_2; Y_{22}) - I(U_2; X_{11}) \}. \quad (39)$$

This half-duplex $R_2^{\max}$ is the same as in the full-duplex case of (4). Even though this equality seems somewhat surprising, it is indeed the case in the limit of $\tau \rightarrow 0$, given that user 1 sends just enough information for S_2 to be able to decode completely in the first phase and then bin against it in the second phase. At $\tau = 0$ and $X_{12} = X_{11} = \emptyset$, S_2 can achieve the interference-free rate.

B. Half-duplex Han-Kobayashi PDF-binning scheme

The first half-duplex coding scheme utilizes PDF-binning at the second sender and achieves the maximum possible rates for both user 1 and user 2. But it does not include the Han-Kobayashi scheme for the interference channel. In this section, we extend this scheme to combine with the Han-Kobayashi scheme by further splitting the messages in the second phase.

The coding structure for half-duplex HK-PDF-binning is shown in Figure 8. The encoding and decoding procedure in the first phase is the same as that of half-duplex PDF-binning. The major difference is in the second phase. Message w_1 of the first sender S_1 is split into three parts (w_{10}, w_{11}, w_{12}), corresponding to the forwarding, public and private parts. Message w_2 is split into 2 parts (w_{21}, w_{22}), corresponding to the public and private parts. We generate independent codewords for messages w_{10} and w_{11} and superimpose w_{12} on both of them. In the first phase, S_1 sends a codeword containing w_{10} , while S_2 does not send any message. At the end of the first phase, S_2 decode $\tilde{w}_{10}$ using the received signal vector $\mathbf{y}$ and then bins its private part w_{22} against the decoded message $\tilde{w}_{10}$, conditionally on knowing the public part w_{21} . In the second phase, S_1 sends a codeword containing (w_{10}, w_{11}, w_{12}) while S_2 sends the binned signal containing (w_{10}, w_{21}, w_{22}). At the end of the second phase, T_1 uses joint decoding across both phases and searches for a unique triple $(\hat{w}_{10}, \hat{w}_{11}, \hat{w}_{12})$ for some w_{21} . T_2 also uses joint decoding based on the received signal in the second phase and searches for a unique pair $(\hat{w}_{21}, \hat{w}_{22})$ for some $\hat{w}_{11}$.

Specifically, in the first phase, S_1 sends $x_{11}^{\tau n}(w_{10})$; S_2 does not transmit. In the second phase, S_1 sends $x_{12}^{\bar{\tau} n}(w_{12}|w_{10}, w_{11})$; S_2 searches for some v_{22} such that

$$(x_{11}^{\bar{\tau} n}(w_{10}), u_{21}^{\bar{\tau} n}(w_{21}), u_{22}^{\bar{\tau} n}(w_{22}, v_{22}|w_{21})) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{X_{11}U_{22}|U_{21}}), \quad (40)$$

and then sends $x_2^{\bar{\tau} n}(w_{10}, w_{21}, w_{22}, v_{22})$.

For decoding, at the end of the first phase, S_2 searches for a unique $\hat{w}_{10}$ such that

$$(x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y}). \quad (41)$$

At the end of the second phase, T_1 searches for a unique $(\hat{w}_{10}, \hat{w}_{11}, \hat{w}_{12})$ for some $\hat{w}_{21}$ such that

$$(x_{11}^{\bar{\tau} n}(\hat{w}_{10}), u_{11}^{\bar{\tau} n}(\hat{w}_{11}), x_{12}^{\bar{\tau} n}(\hat{w}_{12}|\hat{w}_{10}, \hat{w}_{11}), u_{21}^{\bar{\tau} n}(\hat{w}_{21}), \mathbf{y}_{12}) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{X_{11}U_{11}X_{12}U_{21}Y_{12}}) \\ \text{and } x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}_{11}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y_{11}}). \quad (42)$$

T_2 searches for a unique $(\hat{w}_{21}, \hat{w}_{22})$ for some $(\hat{w}_{11}, \hat{v}_{22})$ such that

$$(u_{11}^{\bar{\tau} n}(\hat{w}_{11}), u_{21}^{\bar{\tau} n}(\hat{w}_{21}), u_{22}^{\bar{\tau} n}(\hat{w}_{22}, \hat{v}_{22}|\hat{w}_{21}), \mathbf{y}_{22}) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{U_{11}U_{21}U_{22}Y_{22}}). \quad (43)$$

Note that similar to the full-duplex scheme in Section III-B, we use conditional binning in step (40), and joint decoding at both destinations in steps (42) and (43) (see Remark 4).

Theorem 5. *The convex hull of the following rate region is achievable for the half-duplex cognitive relay channel using the HK-PDF-binning scheme:*

$$\bigcup_{P_4} \left\{ \begin{array}{ll} R_1 & \leq \min\{I_2 + I_5, I_6\} \\ R_2 & \leq I_{12} - I_1 \\ R_1 + R_2 & \leq \min\{I_2 + I_7, I_8\} + I_{13} - I_1 \\ R_1 + R_2 & \leq \min\{I_2 + I_3, I_4\} + I_{14} - I_1 \\ R_1 + R_2 & \leq \min\{I_2 + I_9, I_{10}\} + I_{11} - I_1 \\ 2R_1 + R_2 & \leq \min\{I_2 + I_3, I_4\} + \min\{I_2 + I_9, I_{10}\} + I_{13} - I_1 \\ R_1 + 2R_2 & \leq \min\{I_2 + I_7, I_8\} + I_{11} - I_1 + I_{14} - I_1 \end{array} \right. \quad (44)$$

where

$$P_4 = p(x_{11})p(u_{11})p(x_{12}|u_{11}, x_{11})p(u_{21})p(u_{22}|u_{21}, x_{11}) \\ p(x_{22}|x_{11}, u_{21}, u_{22})p_c(y_{11}, y_{21}, y, y_{12}, y_{22}|x_{11}, x_{12}, x_{22}), \quad (45)$$

with p_c as given in (1) and

$$\begin{aligned} I_1 &= \bar{\tau} I(U_{22}; X_{11}|U_{21}) \\ I_2 &= \tau I(X_{11}; Y) \\ I_3 &= \bar{\tau} I(U_{12}; Y_{12}|X_{11}, U_{11}, U_{21}) \\ I_4 &= \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, X_{12}; Y_{12}|U_{11}, U_{21}) \\ I_5 &= \bar{\tau} I(U_{11}, X_{12}; Y_{12}|X_{11}, U_{21}) \\ I_6 &= \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, U_{11}, X_{12}; Y_{12}|U_{21}) \\ I_7 &= \bar{\tau} I(X_{12}, U_{21}; Y_{12}|X_{11}, U_{11}) \\ I_8 &= \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, X_{12}, U_{21}; Y_{12}|U_{11}) \end{aligned}$$

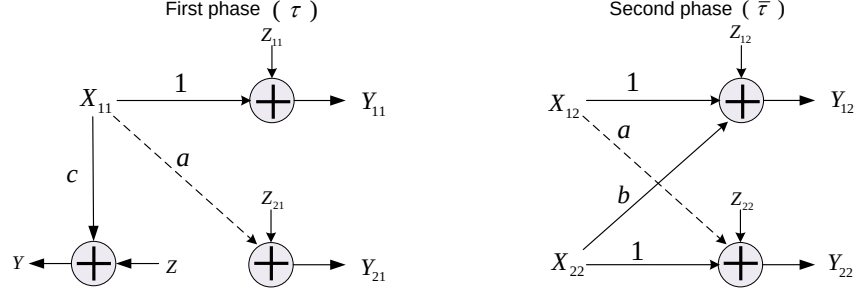


Fig. 9. The half-duplex Gaussian cognitive relay channel model.

$$\begin{aligned}
 I_9 &= \bar{\tau} I(U_{11}, X_{12}, U_{21}; Y_{12} | X_{11}) \\
 I_{10} &= \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, U_{11}, X_{12}, U_{21}; Y_{12}) \\
 I_{11} &= \bar{\tau} I(U_{22}; Y_{22} | U_{21}, U_{11}) \\
 I_{12} &= \bar{\tau} I(U_{21}, U_{22}; Y_{22} | U_{11}) \\
 I_{13} &= \bar{\tau} I(U_{11}, U_{22}; Y_{22} | U_{21}) \\
 I_{14} &= \bar{\tau} I(U_{11}, U_{21}, U_{22}; Y_{22})
 \end{aligned} \tag{46}$$

where $\bar{\tau} = 1 - \tau, 0 \leq \tau \leq 1$.

Proof: See Appendix C for the details. ■

Remark 9. Inclusion of half-duplex PDF-binning and Han-Kobayashi schemes.

- The half-duplex HK-PDF-binning scheme becomes half-duplex PDF-binning if $U_{11} = U_{21} = \emptyset$.
- The half-duplex HK-PDF-binning scheme becomes the Han-Kobayashi scheme if $\tau = 0$, $X_{11} = \emptyset$ and $X_{22} = U_{22}$.
- The maximum rates for S_1 and S_2 are the same as in (38) and (39).

VI. HALF-DUPLEX GAUSSIAN CRC RATE REGIONS

A. Half-duplex Gaussian CRC model

The Gaussian model for the half-duplex cognitive relay channel is shown in Figure 9. The input-output signals can be represented as

$$\begin{aligned}
 \text{First phase : } Y &= cX_{11} + Z, \\
 Y_{11} &= X_{11} + Z_{11}, \\
 Y_{21} &= aX_{11} + Z_{21};
 \end{aligned} \tag{47}$$

$$\begin{aligned}
 \text{Second phase : } Y_{12} &= X_{12} + bX_{22} + Z_{12}, \\
 Y_{22} &= aX_{12} + X_{22} + Z_{22},
 \end{aligned} \tag{48}$$

where X_{11} is the transmit signal of S_1 in the first phase, X_{12} and X_{22} are the transmit signals of S_1 and S_2 in the second phase, respectively. Y , Y_{11} and Y_{21} are the received signals at S_2 , T_1 and T_2 in the first phase. Y_{21} and Y_{22} are the received signals at T_1 and T_2 in the second phase. a , b , and c are the channel gains where the direct

links are normalized to 1 as in the standard interference channel [6]. Z , Z_{11} , Z_{21} , Z_{12} , and Z_{22} are independent white Gaussian noises with unit variance.

In the following section, we only provide the analysis for the half-duplex Gaussian HK-PDF-binning scheme and omit the analysis for half-duplex PDF-binning, which is a special case of HK-PDF-binning.

B. Signaling and rates for the half-duplex HK-PDF-binning

In a Gaussian channel, input signals for the HK-PDF-binning scheme as in Section V-B can be represented as

$$\begin{aligned} X_{11} &= \alpha_1 S_{10}(w_{10}), \\ X_{12} &= \alpha_2 S_{10}(w_{10}) + \beta_2 S_{11}(w_{11}) + \gamma_2 S_{12}(w_{12}), \\ X_{22} &= \theta S_{21}(w_{21}) + \mu \left(\rho S_{10}(w_{10}) + \sqrt{1 - \rho^2} S_{22} \right), \\ U_{22} &= X_{22} + \lambda S_{10} = (\mu\rho + \lambda) S_{10} + \theta S_{21} + \mu\sqrt{1 - \rho^2} S_{22}, \end{aligned} \quad (49)$$

where S_{10} , S_{11} , S_{12} , S_{21} and S_{22} are independent $\mathcal{N}(0, 1)$ random variables that encode w_{10} , w_{11} , w_{12} , w_{21} and w_{22} respectively, U_{22} is the Gelfand-Pinsker binning variable that encodes w_{22} . The parameter ρ is the correlation factor between the transmit signal X_{22} and the state X_{11} , similar to that in Section IV-B. λ is a parameter for binning. Parameters α_1 , α_2 , β_2 , γ_2 , θ and μ are the corresponding power allocations that satisfy the power constraints

$$\begin{aligned} \tau\alpha_1^2 + \bar{\tau}(\alpha_2^2 + \beta_2^2 + \gamma_2^2) &\leq P_1, \\ \bar{\tau}(\mu^2 + \theta^2) &\leq P_2, \end{aligned} \quad (50)$$

where τ and $\bar{\tau} = 1 - \tau$ are the time duration for the two phases.

Substitute X_{11} , X_{12} , X_{22} into Y , Y_{11} , Y_{21} , Y_{12} , Y_{22} in (47) and (48), we get

$$\begin{aligned} Y &= c\alpha_1 S_{10} + Z, \\ Y_{11} &= \alpha_1 S_{10} + Z_{11}, \\ Y_{21} &= a\alpha_1 S_{10} + Z_{21}, \\ Y_{12} &= (\alpha_2 + b\mu\rho) S_{10} + \beta_2 S_{11} + \gamma_2 S_{12} + b\theta S_{21} + b\mu\sqrt{1 - \rho^2} S_{22} + Z_{12}, \\ Y_{22} &= (a\alpha_2 + \mu\rho) S_{10} + a\beta_2 S_{11} + a\gamma_2 S_{12} + \theta S_{21} + \mu\sqrt{1 - \rho^2} S_{22} + Z_{22}. \end{aligned} \quad (51)$$

Corollary 4. *The achievable rate region for the half-duplex cognitive relay channel using Han-Kobayashi PDF-binning is the convex hull of all rate pairs (R_1, R_2) satisfying*

$$\begin{aligned} R_1 &\leq \min\{I_2 + I_5, I_6\}, \\ R_2 &\leq I_{12} - I_1, \\ R_1 + R_2 &\leq \min\{I_2 + I_7, I_8\} + I_{13} - I_1, \\ R_1 + R_2 &\leq \min\{I_2 + I_3, I_4\} + I_{14} - I_1, \\ R_1 + R_2 &\leq \min\{I_2 + I_9, I_{10}\} + I_{11} - I_1, \\ 2R_1 + R_2 &\leq \min\{I_2 + I_3, I_4\} + \min\{I_2 + I_9, I_{10}\} + I_{13} - I_1, \\ R_1 + 2R_2 &\leq \min\{I_2 + I_7, I_8\} + I_{11} - I_1 + I_{14} - I_1, \end{aligned} \quad (52)$$

where

$$\begin{aligned}
I_2 &= \tau C(c^2 \alpha_1^2), \\
I_3 &= \bar{\tau} C\left(\frac{\gamma_2^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_4 &= \tau C(\alpha_1^2) + \bar{\tau} C\left(\frac{(\alpha_2 + b\mu\rho)^2 + \gamma_2^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_5 &= \bar{\tau} C\left(\frac{\beta_2^2 + \gamma_2^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_6 &= \tau C(\alpha_1^2) + \bar{\tau} C\left(\frac{(\alpha_2 + b\mu\rho)^2 + \beta_2^2 + \gamma_2^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_7 &= \bar{\tau} C\left(\frac{\gamma_2^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_8 &= \tau C(\alpha_1^2) + \bar{\tau} C\left(\frac{(\alpha_2 + b\mu\rho)^2 + \gamma_2^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_9 &= \bar{\tau} C\left(\frac{\beta_2^2 + \gamma_2^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_{10} &= \tau C(\alpha_1^2) + \bar{\tau} C\left(\frac{(\alpha_2 + b\mu\rho)^2 + \beta_2^2 + \gamma_2^2 + b^2 \theta^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
I_{11} - I_1 &= \bar{\tau} C\left(\frac{\mu^2 (1 - \rho^2)}{a^2 \gamma_2^2 + 1}\right), \\
I_{12} - I_1 &= \bar{\tau} C\left(\frac{\mu^2 (1 - \rho^2)}{a^2 \gamma_2^2 + 1}\right) + \bar{\tau} C\left(\frac{\theta^2}{(a\alpha_2 + \mu\rho)^2 + a^2 \gamma_2^2 + \mu^2 (1 - \rho^2) + 1}\right), \\
I_{13} - I_1 &= \bar{\tau} C\left(\frac{\mu^2 (1 - \rho^2)}{a^2 \gamma_2^2 + 1}\right) + \bar{\tau} C\left(\frac{a^2 \beta_2^2}{(a\alpha_2 + \mu\rho)^2 + a^2 \gamma_2^2 + \mu^2 (1 - \rho^2) + 1}\right), \\
I_{14} - I_1 &= \bar{\tau} C\left(\frac{\mu^2 (1 - \rho^2)}{a^2 \gamma_2^2 + 1}\right) + \bar{\tau} C\left(\frac{a^2 \beta_2^2 + \theta^2}{(a\alpha_2 + \mu\rho)^2 + a^2 \gamma_2^2 + \mu^2 (1 - \rho^2) + 1}\right),
\end{aligned}$$

and $C(x) = 0.5 \log_2(1 + x)$; $\tau \in [0, 1]$ and $\tau + \bar{\tau} = 1$; $\rho \in [-1, 1]$ is the correlation factor between S_2 's transmit signal X_{22} and the state X_{11} ; and the power allocations α_1 , α_2 , β_2 , γ_2 , θ and μ satisfy the power constraints (50).

Proof: Applying the signaling in (49) to Theorem 5, we obtain the rate region in Corollary 4. ■

Remark 10. Inclusion of half-duplex PDF-binning and Han-Kobayashi schemes.

- If we set $\tau = 0$, $\alpha_1 = \alpha_2 = 0$, $\rho = 0$, rate region (52) becomes the Han-Kobayashi region [8].
- If we set $\beta_2 = \theta = 0$, rate region (52) becomes the half-duplex PDF-binning region.
- The half-duplex PDF-binning region is the convex hull of all rate pairs (R_1, R_2) satisfying

$$\begin{aligned}
R_1 &\leq \tau C(c^2 \alpha_1^2) + \bar{\tau} C\left(\frac{\gamma_2^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
R_1 &\leq \tau C(\alpha_1^2) + \bar{\tau} C\left(\frac{(\alpha_2 + b\mu\rho)^2 + \gamma_2^2}{b^2 \mu^2 (1 - \rho^2) + 1}\right), \\
R_2 &\leq \bar{\tau} C\left(\frac{\mu^2 (1 - \rho^2)}{a^2 \gamma_2^2 + 1}\right),
\end{aligned} \tag{53}$$

where the power allocations α_1 , α_2 , γ_2 and μ satisfy the power constraints

$$\begin{aligned}\tau\alpha_1^2 + \bar{\tau}(\alpha_2^2 + \gamma_2^2) &\leq P_1, \\ \bar{\tau}\mu^2 &\leq P_2.\end{aligned}\tag{54}$$

- The maximum rate for S_1 is achieved by setting $\beta_2 = \theta = 0$, $\rho = \pm 1$ and $\mu = \rho\sqrt{P_2}$ as

$$R_1^{\max} = \max_{\tau\alpha_1^2 + \bar{\tau}(\alpha_2^2 + \gamma_2^2) \leq P_1} \min \left\{ \tau C(c^2\alpha_1^2) + \bar{\tau} C(\gamma_2^2), \tau C(\alpha_1^2) + \bar{\tau} C\left(\left(\alpha_2 + b\sqrt{P_2}\right)^2 + \gamma_2^2\right) \right\}.\tag{55}$$

A solution for this optimization problem is available in [30]. Note that in the half-duplex mode, partial decode-forward achieves a strictly higher rate than pure decode-forward for the Gaussian channel.

- The maximum rate for S_2 is achieved by setting $\tau = 0$, $\rho = 0$, $\alpha_1 = \alpha_2 = \beta_2 = \gamma_2 = \theta = 0$, and $\mu = \sqrt{P_2}$ as

$$R_2^{\max} = C(P_2).\tag{56}$$

Remark 11. The optimal binning parameter can be found similarly to the full-duplex case as follows.

Corollary 5. The optimal parameter λ for the half-duplex Han-Kobayashi partial decode-forward binning scheme is

$$\lambda^* = \frac{a\alpha_2\mu^2(1-\rho^2) - \mu\rho(a^2\gamma_2^2 + 1)}{a^2\gamma_2^2 + \mu^2(1-\rho^2) + 1}.\tag{57}$$

Proof: Similar approach to the proof of Corollary 3. ■

C. Performance Comparison

1) *Existing results:* Very few results currently exist for the CRC. We can only find two results for the half-duplex mode. Next we briefly discuss each of these results.

Devroye, Mitran and Tarokh [10] propose four half-duplex protocols with rate region as the convex hull of the four regions. One protocol is the Han-Kobayashi scheme for the interference channel, and the other three are 2-phase protocols in which S_2 obtains S_1 's message causally in the first phase as in a broadcast channel, then transmits cognitively in the second phase. All these 3 protocols have T_1 decode at the end of both phases instead of only at the end of the second phase, hence they are suboptimal. Protocol 2 has the idea of decode-forward by keeping the same input distribution at S_1 in both phases, but because in the second phase, it reduces rate at S_1 , thus it does not achieve the rate of decode-forward relaying. Thus, even though the rate region includes the Han-Kobayashi region (in protocol 3), it does not include partial decode-forward relaying.

Chatterjee, Tong and Oyman [34] propose an achievable rate region for the half-duplex CRC based on rate-splitting, block Markov encoding, Gelfand-Pinsker binning and backward decoding. The transmission is performed in B blocks, each is divided into two phases. In each phase, each user splits its message into two parts, one common and one private. The primary user (S_1) superimposes its messages in both phases of the current block on the messages in the first phase of the previous block. The cognitive user (S_2) only transmits in the second phase and bins both its message parts against the private message of S_1 in the first phase of the previous block. Backward decoding is then used to decode the messages after B blocks. We have several comments on this scheme:

- Block Markovity is not necessary in half-duplex mode. We can superimpose the second-phase signal on the first-phase signal of the same block, instead of superimposing both phase signals on the first-phase signal of the previous block and using backward decoding as in [34]. Such a half-duplex block Markovity incurs

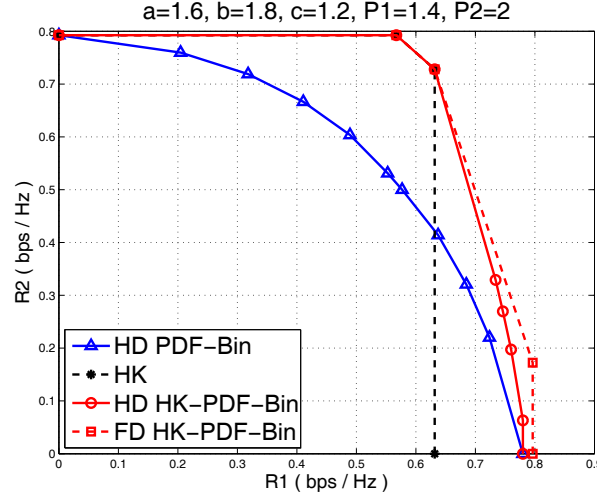


Fig. 10. Comparison of four coding schemes (HD = half-duplex, FD = full-duplex).

unnecessarily long decoding delay and also wastes power to transmit the first-phase information of the current block, which is decoded backwardly.

- Joint decoding of both the state and the binning auxiliary random variable at T_1 is not valid (similar to [25], [26]). The rate region is thus larger than possible, but can be corrected in this step.
- This scheme only covers half-duplex decode-forward relaying (when there is no binning) instead of partial decode-forward relaying and hence achieves a maximum rate for R_1 smaller than (55).

2) *Numerical Examples:* In this section, we provide numerical results to compare the two proposed schemes with the Han-Kobayashi and other known coding schemes [10], [34] for the half-duplex CRC.

Figure 10 shows the comparison between half-duplex PDF-binning, HK-PDF-binning and the Han-Kobayashi scheme. It can be seen that although PDF-binning has a larger maximum rate for R_1 than the Han-Kobayashi scheme, it is not always better. But the half-duplex HK-PDF-binning rate region encompasses both the Han-Kobayashi and the PDF-binning regions.

In Figure 11, we compare the HK-PDF-binning schemes with existing half-duplex schemes for the CRC in [10], [34]. We can see that HK-PDF-binning is strictly better than all existing schemes. Furthermore, the proposed scheme is more comprehensive than the protocols in [10] and simpler than the scheme in [34].

These figures also show that the gap in achievable rates by the HK-PDF-binning scheme in the half- and full-duplex modes is quite small. Thus, the rate loss caused by the half-duplex constraint appears to be insignificant.

VII. CONCLUSION

In this paper, we have proposed two new coding schemes for both the full- and half-duplex cognitive relay channels. These two schemes are based on partial decode-forward relaying, Gelfand-Pinsker binning and Han-Kobayashi coding. The half-duplex schemes are adapted from the full-duplex schemes by sending different message parts in different phases, removing the block Markov encoding and applying joint decoding across both phases.

When applied to Gaussian channels, different from the traditional binning in dirty paper coding, in which the transmit signal is independent of the state, here we introduce a correlation between the transmit signal and the state, which enlarges the rate region by allowing both binning and forwarding. We also derive the optimal binning

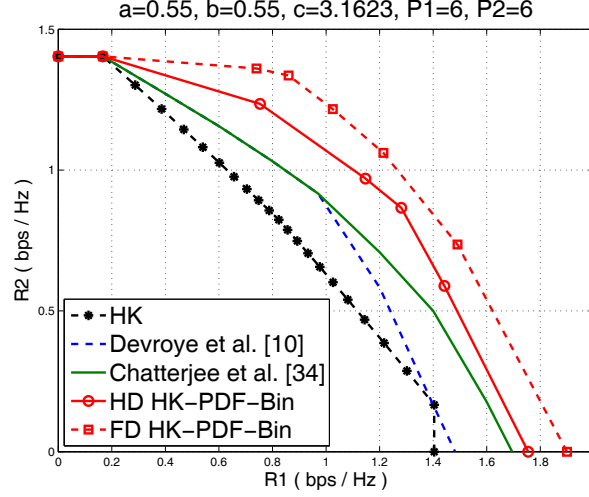


Fig. 11. Comparison of the HK-PDF-binning schemes with existing schemes.

parameter for each coding scheme. Results show that the proposed binning schemes achieve a higher rate than all existing schemes for user 1 by allowing user 2 to also forward a part of the message of user 1. Furthermore, the Han-Kobayashi PDF-binning scheme contains both the Han-Kobayashi scheme and partial decode-forward relaying and outperforms all existing schemes by achieving a larger rate region for both users. Numerical results also suggest that the difference in achievable rates between the half- and full-duplex modes for the CRC is small.

APPENDIX A

PROOF OF THE OPTIMAL BINNING PARAMETER λ^* FOR FULL-DUPLEX HK-PDF-BINNING

To simultaneously maximize R_1 and R_2 in region (9), we can simply maximize the term $I_{11} - I_1$ as follows.

$$\begin{aligned}
 & I(U_{22}; Y_2 | U_{21}, U_{11}) - I(U_{22}; T_{10} | U_{21}) \\
 &= H(Y_2 | U_{21}, U_{11}) - H(Y_2 | U_{21}, U_{22}, U_{11}) - H(U_{22} | U_{21}) + H(U_{22} | T_{10}, U_{21}) \\
 &= H(Y'_2) - H(Y'_2 | U'_{22}) - H(U'_{22}) + H(U_{22} | T_{10}, U_{21}) \\
 &= H(Y'_2) + H(U_{22} | T_{10}, U_{21}) - H(U'_{22}, Y'_2),
 \end{aligned}$$

where

$$\begin{aligned}
 Y'_2 &= Y_2 | U_{21}, U_{11} = (a\alpha + \mu\rho)S'_{10} + a\beta S_{10} + a\delta S_{12} + \mu\sqrt{1 - \rho^2}S_{22} + Z_2 \\
 U'_{22} &= U_{22} | U_{21}, U_{11} = (\mu\rho + \lambda)S'_{10} + \mu\sqrt{1 - \rho^2}S_{22}.
 \end{aligned}$$

Note that λ only affects the last term $H(U'_{22}, Y'_2)$. The covariance matrix between U'_{22} and Y'_2 is

$$\text{cov}(U'_{22}, Y'_2) = \begin{bmatrix} \text{var}(U'_{22}) & \text{E}(U'_{22}, Y'_2) \\ \text{E}(U'_{22}, Y'_2) & \text{var}(Y'_2) \end{bmatrix}, \quad (58)$$

where

$$\begin{aligned}\text{var}(U'_{22}) &= \mu^2 + \lambda^2 + 2\mu\rho\lambda, \\ \mathbb{E}(U'_{22}, Y'_2) &= (\mu\rho + \lambda)(a\alpha + \mu\rho) + \mu^2(1 - \rho^2), \\ \text{var}(Y'_2) &= (a\alpha + \mu\rho)^2 + a^2\beta^2 + a^2\delta^2 + \mu^2(1 - \rho^2) + 1.\end{aligned}$$

Minimizing the determinant of the matrix in (58) leads to the optimal λ as in (32).

APPENDIX B

PROOF OF THEOREM 4 (HALF-DUPLEX PDF-BINNING)

We use random codes and fix a joint probability distribution

$$p(x_{11})p(x_{12}|x_{11})p(u_2|x_{11})p(x_{22}|x_{11}, u_2).$$

A. Codebook generation

- Independently generate $2^{nR_{10}}$ sequences $x_{11}^n \sim \prod_{k=1}^n p(x_{11k})$. Index these codewords as $x_{11}^n(w_{10})$, $w_{10} \in [1, 2^{nR_{10}}]$.
- For each $x_{11}^n(w_{10})$, independently generate $2^{nR_{11}}$ sequences $x_{12}^n \sim \prod_{k=1}^n p(x_{12k}|x_{11k})$. Index these codewords as $x_{12}^n(w_{11}|w_{10})$, $w_{11} \in [1, 2^{nR_{11}}]$, $w_{10} \in [1, 2^{nR_{10}}]$.
- Independently generate $2^{n(R_2+R'_2)}$ sequences $u_2^n \sim \prod_{k=1}^n p(u_{2k})$. Index these codewords as $u_2^n(w_2, v_2)$, $w_2 \in [1, 2^{nR_2}]$ and $v_2 \in [1, 2^{nR'_2}]$.
- For each $x_{11}^n(w_{10})$ and $u_2^n(w_2, v_2)$, generate one $x_{22}^n \sim \prod_{k=1}^n p(x_{22k}|x_{11k}, u_{2k})$. Index these codewords as $x_{22}^n(w_{10}, w_2, v_2)$, $w_2 \in [1, 2^{nR_2}]$, $v_2 \in [1, 2^{nR'_2}]$.

B. Encoding

- In the first phase, S_1 sends the codewords $x_{11}^{\tau n}(w_{10})$. S_2 does not send anything.
- In the second phase, S_1 sends $x_{12}^{\bar{\tau} n}(w_{11}|w_{10})$.

For S_2 , it searches for a v_2 such that

$$(x_{11}^{\bar{\tau} n}(w_{10}), u_2^{\bar{\tau} n}(w_2, v_2)) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{X_{11}U_2}).$$

Such v_2 exists with high probability if

$$R'_2 \geq \bar{\tau} I(U_2; X_{11}). \quad (59)$$

S_2 then transmits $x_{22}^{\bar{\tau} n}(w_{10}, w_2, v_2)$.

C. Decoding

- At the end of the first phase, S_2 searches for a unique $\hat{w}_{10}$ such that

$$(x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y}).$$

We can show that the decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_{10} \leq \tau I(X_{11}; Y). \quad (60)$$

- At the end of the second phase, T_1 searches for a unique $(\hat{w}_{10}, \hat{w}_{11})$ such that

$$(x_{11}^{\bar{\tau}n}(\hat{w}_{10}), x_{12}^{\bar{\tau}n}(\hat{w}_{11}|\hat{w}_{10}), \mathbf{y}_{12}) \in A_{\epsilon}^{(\bar{\tau}n)}(P_{X_{11}X_{12}Y_{12}})$$

$$\text{and } (x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}_{11}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y_{11}}).$$

Here $\mathbf{y}_{11}$ and $\mathbf{y}_{12}$ indicate the received vectors at T_1 during the first and second phases. The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_{11} \leq \bar{\tau}I(X_{12}; Y_{12}|X_{11})$$

$$R_{10} + R_{11} \leq \bar{\tau}I(X_{11}, X_{12}; Y_{12}) + \tau I(X_{11}; Y_{11}). \quad (61)$$

- T_2 treats the codeword $X_{11}^{\bar{\tau}n}$ from S_1 as the state and decodes w_2 . It searches for a unique $\hat{w}_2$ for some $\hat{v}_2$ such that

$$(u_2^{\bar{\tau}n}(\hat{w}_2, \hat{v}_2), \mathbf{y}_{22}) \in A_{\epsilon}^{(\bar{\tau}n)}(P_{U_2Y_{22}}).$$

The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_2 + R'_2 \leq \bar{\tau}I(U_2; Y_{22}). \quad (62)$$

Combine all the above rate constraints, we get

$$R'_2 \geq \bar{\tau}I(U_2; X_{11})$$

$$R_{10} \leq \tau I(X_{11}; Y)$$

$$R_{11} \leq \bar{\tau}I(X_{12}; Y_{12}|X_{11})$$

$$R_{10} + R_{11} \leq \bar{\tau}I(X_{11}, X_{12}; Y_{12}) + \tau I(X_{11}; Y_{11})$$

$$R_2 + R'_2 \leq \bar{\tau}I(U_2; Y_{22}). \quad (63)$$

Let $R_1 = R_{10} + R_{11}$, apply Fourier-Motzkin Elimination, we get region (37).

APPENDIX C

PROOF OF THEOREM 5 (HALF-DUPLEX HK-PDF-BINNING)

We use random codes and fix a joint probability distribution

$$p(x_{11})p(u_{11})p(x_{12}|x_{11}, u_{11})p(u_{21})p(u_{22}|u_{21}, x_{11})p(x_{22}|x_{11}, u_{21}, u_{22}).$$

A. Codebook generation

- Independently generate $2^{nR_{10}}$ sequences $x_{11}^n \sim \prod_{k=1}^n p(x_{11k})$. Index these codewords as $x_{11}^n(w_{10})$, $w_{10} \in [1, 2^{nR_{10}}]$.
- Independently generate $2^{nR_{11}}$ sequences $u_{11}^n \sim \prod_{k=1}^n p(u_{11k})$. Index these codewords as $u_{11}^n(w_{11})$, $w_{11} \in [1, 2^{nR_{11}}]$.
- For each $x_{11}^n(w_{10})$ and $u_{11}^n(w_{11})$, independently generate $2^{nR_{12}}$ sequences $x_{12}^n \sim \prod_{k=1}^n p(x_{12k}|x_{11k}, u_{11k})$. Index these codewords as $x_{12}^n(w_{12}|w_{10}, w_{11})$, $w_{12} \in [1, 2^{nR_{12}}]$.
- Independently generate $2^{n(R_{21})}$ sequences $u_{21}^n \sim \prod_{k=1}^n p(u_{21k})$. Index these codewords as $u_{21}^n(w_{21})$, $w_{21} \in [1, 2^{nR_{21}}]$.

- For each $u_{21}^n(w_{21})$, independently generate $2^{n(R_{22}+R'_{22})}$ sequences $u_{22}^n \sim \prod_{k=1}^n p(u_{22k}|u_{21k})$. Index these codewords as $u_{22}^n(w_{22}, v_{22}|w_{21})$, $w_{22} \in [1, 2^{nR_{22}}]$, $v_{22} \in [1, 2^{nR'_{22}}]$.
- For each $x_{11}(w_{10})$, $u_{21}^n(w_{21})$ and $u_{22}^n(w_{22}, v_{22}|w_{21})$, generate one $x_{22}^n \sim \prod_{k=1}^n p(x_{22k}|u_{22k}, u_{21k}, x_{11k})$. Index these codewords as $x_{22}^n(w_{10}, w_{21}, w_{22}, v_{22})$.

B. Encoding

- In the first phase, S_1 sends the codewords $X_{11}^{\tau n}(w_{10})$. S_2 does not send anything.
- In the second phase, S_1 sends $x_{12}^{\bar{\tau} n}(w_{12}|w_{10}, w_{11})$.

For S_2 , it searches for some v_{22} such that

$$(x_{11}^{\bar{\tau} n}(w_{10}), u_{21}^{\bar{\tau} n}(w_{21}), u_{22}^{\bar{\tau} n}(w_{22}, v_{22}|w_{21})) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{X_{11}U_{22}|U_{21}}).$$

Such v_{22} exists with high probability if

$$R'_{22} \geq \bar{\tau} I(U_{22}; X_{11}|U_{21}). \quad (64)$$

S_2 then transmits $x_{22}^{\bar{\tau} n}(w_{10}, w_{21}, w_{22}, v_{22})$.

C. Decoding

- At the end of the first phase, S_2 searches for a unique $\hat{w}_{10}$ such that

$$(x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y}).$$

We can show that the decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$R_{10} \leq \tau I(X_{11}; Y). \quad (65)$$

- At the end of the second phase, T_1 searches for a unique $(\hat{w}_{10}, \hat{w}_{11}, \hat{w}_{12})$ for some $\hat{w}_{21}$ such that

$$(x_{11}^{\bar{\tau} n}(\hat{w}_{10}), u_{11}^{\bar{\tau} n}(\hat{w}_{11}), x_{12}^{\bar{\tau} n}(\hat{w}_{12}|\hat{w}_{10}, \hat{w}_{11}), u_{21}^{\bar{\tau} n}(\hat{w}_{21}), \mathbf{y}_{12}) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{X_{11}U_{11}X_{12}U_{21}Y_{12}})$$

$$\text{and } x_{11}^{\tau n}(\hat{w}_{10}), \mathbf{y}_{11}) \in A_{\epsilon}^{(\tau n)}(P_{X_{11}Y_{11}}).$$

The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$\begin{aligned} R_{12} &\leq \bar{\tau} I(X_{12}; Y_{12}|X_{11}, U_{11}, U_{21}) \\ R_{10} + R_{12} &\leq \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, X_{12}; Y_{12}|U_{11}, U_{21}) \\ R_{11} + R_{12} &\leq \bar{\tau} I(U_{11}, X_{12}; Y_{12}|X_{11}, U_{21}) \\ R_{10} + R_{11} + R_{12} &\leq \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, U_{11}, X_{12}; Y_{12}|U_{21}) \\ R_{12} + R_{21} &\leq \bar{\tau} I(X_{12}, U_{21}; Y_{12}|X_{11}, U_{11}) \\ R_{10} + R_{12} + R_{21} &\leq \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, X_{12}, U_{21}; Y_{12}|U_{11}) \\ R_{11} + R_{12} + R_{21} &\leq \bar{\tau} I(U_{11}, X_{12}, U_{21}; Y_{12}|X_{11}) \\ R_{10} + R_{11} + R_{12} + R_{21} &\leq \tau I(X_{11}; Y_{11}) + \bar{\tau} I(X_{11}, U_{11}, X_{12}, U_{21}; Y_{12}). \end{aligned} \quad (66)$$

- T_2 uses jointly decoding to decode (w_{11}, w_{21}, w_{22}) . It searches for a unique $(\hat{w}_{21}, \hat{w}_{22})$ for some $(\hat{w}_{11}, \hat{v}_{22})$ such that

$$(u_{11}^{\bar{\tau} n}(\hat{w}_{11}), u_{21}^{\bar{\tau} n}(\hat{w}_{21}), u_{22}^{\bar{\tau} n}(\hat{w}_{22}, \hat{v}_{22}|\hat{w}_{21}), \mathbf{y}_{22}) \in A_{\epsilon}^{(\bar{\tau} n)}(P_{U_{11}U_{21}U_{22}Y_{22}}).$$

The decoding error probability goes to 0 as $n \rightarrow \infty$ if

$$\begin{aligned}
 R_{22} + R'_{22} &\leq \bar{\tau}I(U_{22}; Y_{22}|U_{21}, U_{11}) \\
 R_{21} + R_{22} + R'_{22} &\leq \bar{\tau}I(U_{21}, U_{22}; Y_{22}|U_{11}) \\
 R_{11} + R_{22} + R'_{22} &\leq \bar{\tau}I(U_{11}, U_{22}; Y_{22}|U_{21}) \\
 R_{11} + R_{21} + R_{22} + R'_{22} &\leq \bar{\tau}I(U_{11}, U_{21}, U_{22}; Y_{22}).
 \end{aligned} \tag{67}$$

Let $R_1 = R_{10} + R_{11} + R_{12}$ and $R_2 = R_{21} + R_{22}$, apply Fourier-Motzkin Elimination on the above constraints, we get region (44).

REFERENCES

- [1] E. C. van der Meulen, "Three-terminal communication channels," *Adv. Appl. Probab.*, vol. 3, pp. 120–154, 1971.
- [2] T. Cover and A. Gamal, "Capacity theorems for the relay channel," *IEEE Trans. on Information Theory*, vol. 25, no. 5, pp. 572–584, Sep. 1979.
- [3] G. Kramer, M. Gastpar, and P. Gupta, "Cooperative strategies and capacity theorems for relay networks," *IEEE Trans. on Information Theory*, vol. 51, no. 9, pp. 3037–3063, Sep. 2005.
- [4] S. H. Lim, Y.-H. Kim, A. El Gamal, and S.-Y. Chung, "Noisy network coding," *IEEE Trans. on Information Theory*, vol. 57, no. 5, pp. 3132–3152, May 2011.
- [5] Y. Liang and G. Kramer, "Rate regions for relay broadcast channels," *IEEE Trans. on Information Theory*, vol. 53, no. 10, pp. 3517–3535, Oct. 2007.
- [6] A. Carleial, "Interference channels," *IEEE Trans. on Information Theory*, vol. 24, no. 1, pp. 60–70, Jan. 1978.
- [7] H. Sato, "The capacity of the Gaussian interference channel under strong interference (corresp.)," *IEEE Trans. on Information Theory*, vol. 27, no. 6, pp. 786–788, Nov. 1981.
- [8] T. Han and K. Kobayashi, "A new achievable rate region for the interference channel," *IEEE Trans. on Information Theory*, vol. 27, no. 1, pp. 49–60, Jan. 1981.
- [9] H.-F. Chong, M. Motani, H. Garg, and H. El Gamal, "On the Han-Kobayashi region for the interference channel," *IEEE Trans. on Information Theory*, vol. 54, no. 7, pp. 3188–3195, July 2008.
- [10] N. Devroye, P. Mitran, and V. Tarokh, "Achievable rates in cognitive radio channels," *IEEE Trans. on Information Theory*, vol. 52, no. 5, pp. 1813–1827, May 2006.
- [11] S. Gel'fand and M. Pinsker, "Coding for channels with random parameters," *Probl. Contr. and Inf. Theory*, vol. 9, no. 1, pp. 19–31, 1980.
- [12] I. Maric, R. Yates, and G. Kramer, "Capacity of interference channels with partial transmitter cooperation," *IEEE Trans. on Information Theory*, vol. 53, no. 10, pp. 3536–3548, Oct. 2007.
- [13] W. Wu, S. Vishwanath, and A. Arapostathis, "Capacity of a class of cognitive radio channels: Interference channels with degraded message sets," *IEEE Trans. on Information Theory*, vol. 53, no. 11, pp. 4391–4399, Nov. 2007.
- [14] J. Jiang and Y. Xin, "On the achievable rate regions for interference channels with degraded message sets," *IEEE Trans. on Information Theory*, vol. 54, no. 10, pp. 4707–4712, Oct. 2008.
- [15] Y. Cao and B. Chen, "Interference channel with one cognitive transmitter," in *Proc. Asilomar Conference on Signals, Systems, and Computers*, Oct. 2008, pp. 1593–1597.
- [16] I. Maric, A. Goldsmith, G. Kramer, and S. Shamai (Shitz), "On the capacity of interference channels with one cooperating transmitter," *European Trans. on Telecommunications*, vol. 19, pp. 405–420, Apr. 2008.
- [17] A. Jovicic and P. Viswanath, "Cognitive radio: An information-theoretic perspective," *IEEE Trans. on Information Theory*, vol. 55, no. 9, pp. 3945–3958, Sep. 2009.
- [18] S. Rini, D. Tuninetti, and N. Devroye, "New inner and outer bounds for the memoryless cognitive interference channel and some new capacity results," *IEEE Trans. on Information Theory*, vol. 57, no. 7, pp. 4087–4109, July 2011.
- [19] K. Marton, "A coding theorem for the discrete memoryless broadcast channel," *IEEE Trans. on Information Theory*, vol. 25, no. 3, pp. 306–311, May 1979.
- [20] Y.-H. Kim, A. Sutivong, and T. Cover, "State amplification," *IEEE Trans. on Information Theory*, vol. 54, no. 5, pp. 1850–1859, May 2008.
- [21] M. Costa, "Writing on dirty paper (corresp.)," *IEEE Trans. on Information Theory*, vol. 29, no. 3, pp. 439–441, May 1983.
- [22] A. Host-Madsen, "Capacity bounds for cooperative diversity," *IEEE Trans. on Information Theory*, vol. 52, no. 4, pp. 1522–1544, Apr. 2006.

- [23] V. Prabhakaran and P. Viswanath, "Interference channels with source cooperation," *IEEE Trans. on Information Theory*, vol. 57, no. 1, pp. 156–186, Jan. 2011.
- [24] I.-H. Wang and D. Tse, "Interference mitigation through limited transmitter cooperation," *IEEE Trans. on Information Theory*, vol. 57, no. 5, pp. 2941–2965, May 2011.
- [25] Y. Cao and B. Chen, "An achievable rate region for interference channels with conferencing," in *Proc. IEEE Int'l Symp. on Information Theory (ISIT)*, June 2007, pp. 1251–1255.
- [26] S. Yang and D. Tuninetti, "Interference channel with generalized feedback (a.k.a. with source cooperation): Part i: Achievable region," *IEEE Trans. on Information Theory*, vol. 57, no. 5, pp. 2686–2710, May 2011.
- [27] R. Tandon and S. Ulukus, "Dependence balance based outer bounds for Gaussian networks with cooperation and feedback," *IEEE Trans. on Information Theory*, vol. 57, no. 7, pp. 4063–4086, July 2011.
- [28] A. Hekstra and F. Willems, "Dependence balance bounds for single-output two-way channels," *IEEE Trans. on Information Theory*, vol. 35, no. 1, pp. 44–53, Jan. 1989.
- [29] A. Host-Madsen, "On the capacity of wireless relaying," in *Proc. IEEE Vehicular Technology Conference (VTC)*, vol. 3, Sep. 2002, pp. 1333–1337.
- [30] A. Host-Madsen and J. Zhang, "Capacity bounds and power allocation for wireless relay channels," *IEEE Trans. on Information Theory*, vol. 51, no. 6, pp. 2020–2040, June 2005.
- [31] L. Zhang, J. Jiang, A. Goldsmith, and S. Cui, "Study of Gaussian relay channels with correlated noises," *IEEE Trans. on Communications*, vol. 59, no. 3, pp. 863–876, March 2011.
- [32] Y. Peng and D. Rajan, "Capacity bounds of half-duplex Gaussian cooperative interference channel," in *Proc. IEEE Int'l Symp. on Information Theory (ISIT)*, July 2009, pp. 2081–2085.
- [33] R. Wu, V. Prabhakaran, and P. Viswanath, "Interference channels with half-duplex source cooperation," in *Proc. IEEE Int'l Symp. on Information Theory (ISIT)*, June 2010, pp. 375–379.
- [34] D. Chatterjee, T. Wong, and O. Oyman, "On achievable rate regions for half-duplex causal cognitive radio channels," in *Proc. IEEE Int'l Symp. on Information Theory (ISIT)*, June 2010, pp. 435–439.
- [35] G. M. Ziegler, *Lectures on Polytopes*. New York: Springer-Verlag, 1995.
- [36] S. Rini, D. Tuninetti, and N. Devroye, "New inner and outer bounds for the Gaussian cognitive interference channel and new capacity results," *submitted to IEEE Trans. on Information Theory*, Oct. 2010, available at <http://arxiv.org/abs/1010.5806v1>.
- [37] A. E. Gamal and Y.-H. Kim, *Lecture Notes on Network Information Theory*, June 2010, available at <http://arxiv.org/abs/1001.3404>.